

Rock Drilling Equipment

P&V

Padley & Venables

**2020
UPDATE!**



ROCK DRILLING



DEMOLITION



CONTRACTORS'

**QUALITY TOOLS
MADE IN BRITAIN
PROVEN WORLDWIDE**



WWW.PADLEY-VENABLES.COM



SALES@PADLEY-VENABLES.COM

TEL: +44 (0) 1246 299 100



STRENGTHEN DRILL STRING • PROLONG STEEL LIFE • DECREASE DOWNTIME • INCREASE PRODUCTIVITY

DUAL DRIVE TUNNEL RODS

THE DUAL DRIVE SYSTEM IS DESIGNED AND PATENTED BY PADLEY & VENABLES LTD.

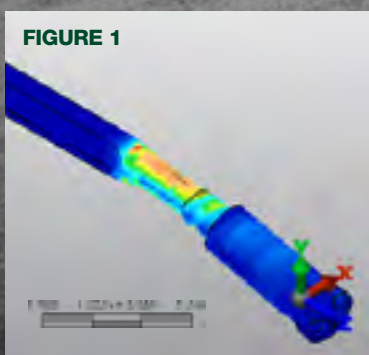


FIGURE 1

Standard Rod under extreme stress and the resulting failure region (warm colours) created in the drilling operation.

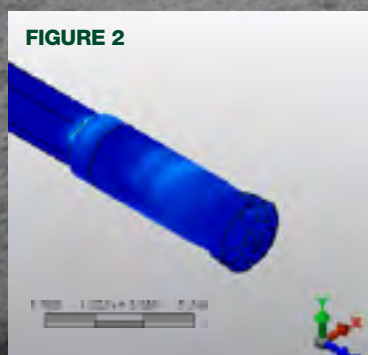


FIGURE 2

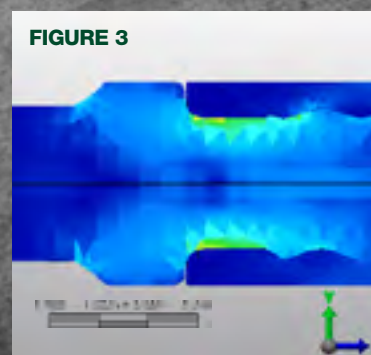


FIGURE 3

FIGURE 2 & 3

Dual Drive steel reduces stress which promotes better performance and longevity.

CONTENTS	PAGE
Technical information	2
Warranty information	3
Integral drill steels	4-5
Taper Drive Equipment	
22 x 7°	6
22 x 12°	7
Small Hole Drilling	
R25 & R28	8
R25	9
Tunnelling and Drifting	
R32/R25	10
R32/R28	10
R32/R35	11-12
R38/R32	13-14
P38/R32	13-14
R38/R35	15
P38/R35	15
Reaming Equipment	
R25/R28 / R32/R35	16
R32/R35	17
Extension Drilling Equipment	
R25	18-19
R32	20-21
P35	22
P38	23-26
P45/P51	27-29
P45	30-31
P51	32
P60	33-35
CT60	36-38
P58/P68	39-41
Shank Index Machine Reference	42-44
Shank Reference Diagrams	45-62
Ancillary Equipment	63-65
Product Weight Reference Index	66-68

TECHNICAL INFORMATION

Choosing the right Bit

Many factors go into choosing the correct Bit for your ground conditions and drilling practices. Production demands have changed in the drilling industry over the past twenty years, most of the pneumatic hammers have been replaced by the harder hitting, faster drilling hydraulic hammers. We are constantly improving our manufacturing practices to produce Bits that offer optimum performance when used with the latest machines. Drawing on our experience in the Rock Drilling Industry we can suggest the best products in various styles and configurations for your particular rock drilling application.

The main design categories are as follows:

Cross Flush

Catalogue reference group "10" intended for use in softer rock conditions. Maximum diameter available with this design is 51mm.

Flat Face

For use in hard to very hard rock formations. Catalogue reference group "20" for standard design. Catalogue reference group "22" for Retractable version.

Retrac Body

Retrac Body is available on Flat Face, Grooved Face and Drop Centre Bit diameters of $\phi 51$ mm upwards. The Retractable design helps drill straighter holes and facilitates Bit removal from the hole.

Ninja/Grooved Face

For use in general drilling applications. Catalogue reference group "30" for standard design. Catalogue reference group "32" for Retractable version.

Drop Centre

For use in medium to hard rock applications where a straight hole is paramount. Catalogue reference group "40" for standard design. Catalogue reference group "42" for Retractable version.

Choosing the right Carbide

The larger the volume of the Carbide, the more aggressive the Bit. The more aggressive Carbides assist movement of the chips away from the face as there is more room for airflow on the face of the Bit. These more aggressive Bits help to break out larger chips, which increases the penetration rate. The greater volume of Carbide can lead to longer Bit life.

Spherical



Spherical Carbides for use in medium to hard rock, with fractured or seamy applications.

Paraboloid



Semi-ballistic shaped, more aggressive than the Spherical Carbides, for soft to medium consistent rock.

Ballistic



Bullet shaped, very aggressive fast penetration in soft to medium consistent rock.

Catalogue Numbers

The main part of the P&V catalogue number is explained as follows: e.g. 4732, where 47 = Button Bit and 32 = R32 thread, followed by 2045, where 20 = Flat Face and 45 is the Bit diameter in millimetres.

The Button type is determined by a letter at the end of the catalogue reference, where S = Spherical inserts, P = Paraboloid inserts and B = Ballistic inserts, e.g. 4732- 2045S.

WARRANTY INFORMATION

WARRANTY

Padley & Venables' tools are guaranteed against defects in raw material and manufacture. No other warranty is implied or expressed.

The Company's liability in respect of any warranty claim is limited to replacement and does not extend to any other expenditure incurred or to any consequential damage. Warranty claims are subject to immediate notification of any problems and return of the goods to P&V under their Returned Goods System.

Operators' attention is drawn to the requirement to select the correct tool and machine for the specific type of application required. When the correct P&V tool is used for its appropriate application and is used in the proper manner for which it is designed and operated within a correctly maintained machine, risks to the safety and health of operators will be avoided.

This Rock Drilling Equipment catalogue was produced in July 2020. E&OE.

FOR HELP IN FINDING THE RIGHT PRODUCT FOR YOU, CALL +44-1246-299100

P&V
Padley & Venables

PAGE
3

P&V





P&V
Padley & Venables


P&V, The Driller Man logo and Ninja are trade marks of Padley and Venables Ltd.

INTEGRAL DRILL STEELS

NOMENCLATURE OF DRILL STEELS



A correctly shaped tip.
Note honed cutting edge.



Date of Manufacture, eg; 5 = 2005, A = January (B = February etc.)

108 x 22mm (4 1/4" x 7/8") SHANK - 22mm HEX BODY



LENGTH (L) mm	CAT. NUMBER
SERIES 11	
800mm (2' 7") x 34mm HEAD	5324-0834
1600mm (5' 3") x 33mm HEAD	5324-1633
2400mm (7' 10") x 32mm HEAD	5324-2432
3200mm (10' 6") x 31mm HEAD	5324-3231
4000mm (13' 1") x 30mm HEAD	5324-4030
4800mm (15' 9") x 29mm HEAD	5324-4829
5600mm (18' 4") x 28mm HEAD	5324-5628
SERIES 12	
800mm (2' 7") x 40mm HEAD	5324-0840
1600mm (5' 3") x 39mm HEAD	5324-1639
2400mm (7' 10") x 38mm HEAD	5324-2438
3200mm (10' 6") x 37mm HEAD	5324-3237
4000mm (13' 1") x 36mm HEAD	5324-4036
4800mm (15' 9") x 35mm HEAD	5324-4835
5600mm (18' 4") x 34mm HEAD	5324-5634
SERIES 13	
400mm (1' 4") x 34mm HEAD	5324-0434
800mm (2' 7") x 33mm HEAD	5324-0833
1200mm (3' 11") x 32mm HEAD	5324-1232
1600mm (5' 3") x 31mm HEAD	5324-1631
2000mm (6' 6") x 30mm HEAD	5324-2030
SERIES 16	
600mm (2' 0") x 35mm HEAD	5324-0635
1200mm (3' 11") x 34mm HEAD	5324-1234
1800mm (5' 11") x 33mm HEAD	5324-1833
2400mm (7' 10") x 32mm HEAD	5324-2432
SERIES 17	
600mm (2' 0") x 41mm HEAD	5324-0641
1200mm (3' 11") x 40mm HEAD	5324-1240
1800mm (5' 11") x 39mm HEAD	5324-1839
2400mm (7' 10") x 38mm HEAD	5324-2438

INTEGRAL DRILL STEELS

R25 THREAD - 22mm HEX BODY (THREADED INTEGRAL DRILL STEELS)



LENGTH (L) mm	CAT. NUMBER
1400mm x 27mm HEAD	5325-1427
1870mm x 27mm HEAD	5325-1927
2400mm x 27mm HEAD	5325-2427
2800mm x 28mm HEAD	5325-2828
3000mm x 28mm HEAD	5325-3028
1600mm x 32mm HEAD	5325-1632

PILOT RODS 108 x 22mm (4 1/4" x 7/8") SHANK - 6° TAPER



LENGTH (L) mm	CAT. NUMBER
800mm x 26mm HEAD	5354-0826
1200mm x 26mm HEAD	5354-1226
2000mm x 26mm HEAD	5354-2026
2400mm x 26mm HEAD	5354-2426

REAMING BITS, BUTTON - 6° TAPER



DIA Ø (D) mm	GAUGE CARBIDES	FACE CARBIDES	GAUGE ANGLE	CAT. NUMBER
64	6 x 10mm	3 x 9mm	35°	4700-1364
76	8 x 11mm	4 x 10mm	35°	4700-1376
89	8 x 12mm	4 x 10mm	35°	4700-1389

FOR HELP IN FINDING THE RIGHT PRODUCT FOR YOU, CALL +44-1246-299100

TAPER DRIVE EQUIPMENT

22 X 7° TAPER EQUIPMENT - CROSS BITS



DIAMETER Ø (D) mm	CAT. NUMBER
32mm (1¼")	4202-0332
35mm (1⅜")	4202-0335
38mm (1½")	4202-0338
41mm (1⅝")	4202-0341

22 X 7° TAPER EQUIPMENT - FLAT FACE BUTTON BITS



DIA Ø (D) mm	GAUGE CARBIDES	FACE CARBIDES	FACE FLUSHING	SIDE FLUSHING	GAUGE ANGLE	CAT. NUMBER
32	5 x 8mm	2 x 6.5mm	1 x 5mm	2 x 5mm	30	4702-2032
35	5 x 9mm	2 x 6.5mm	1 x 5mm	2 x 5mm	30	4702-2035
38	5 x 9mm	2 x 6.5mm	1 x 5mm	2 x 5mm	30	4702-2038
41	5 x 10mm	2 x 8mm	1 x 6mm	2 x 6mm	30	4702-2041
43	5 x 10mm	2 x 8mm	1 x 6mm	2 x 6mm	30	4702-2043
45	5 x 11mm	2 x 9mm	1 x 6mm	2 x 6mm	30	4702-2045

7° TAPER RODS 108 x 22mm (4¼" x ⅞") SHANK - 22mm HEX BODY



LENGTH (L) mm	CAT. NUMBER
600mm (2')	5034-0206
915mm (3')	5034-0209
1220mm (4')	5034-0212
1830mm (6')	5034-0218
2145mm (7')	5034-0221
2435mm (8')	5034-0224
3050mm (10')	5034-0231
3660mm (12')	5034-0236
4000mm (13' ⅙")	5034-0240

Other taper angles

Padley & Venables Taper Angles are denoted by the following Codes:

- 01 = 4.8° x 22 mm
- 02 = 7° x 22 mm
- 03 = 12° x 22 mm
- 06 = 11° x 22 mm
- 09 = 7° x 25 mm

Other Taper Angle Equipment can be ordered by substituting these Codes into the above catalogue numbers.

TAPER DRIVE EQUIPMENT

22 X 12° TAPER EQUIPMENT - CROSS BITS



DIAMETER Ø (D) mm	CAT. NUMBER
32mm (1¼")	4203-0332
35mm (1⅜")	4203-0335
38mm (1½")	4203-0338
41mm (1⅝")	4203-0341
45mm (1¾")	4203-0345
48mm (1⅞")	4203-0348
51mm (2")	4203-0351

22 X 12° TAPER EQUIPMENT - FLAT FACE BUTTON BITS



DIA Ø (D) mm	GAUGE CARBIDES	FACE CARBIDES	FACE FLUSHING	SIDE FLUSHING	GAUGE ANGLE	CAT. NUMBER
32	5 x 8mm	2 x 6.5mm	1 x 5mm	2 x 5mm	30	4703-2032
35	5 x 9mm	2 x 6.5mm	1 x 5mm	2 x 5mm	30	4703-2035
43	5 x 10mm	2 x 8mm	1 x 6mm	2 x 6mm	30	4703-2043
45	5 x 11mm	2 x 9mm	1 x 6mm	2 x 6mm	30	4703-2045

12° TAPER RODS 108 x 22mm (4¼" x ⅞") SHANK - 22mm HEX BODY



LENGTH (L) mm	CAT. NUMBER
600mm (2')	5034-0306
915mm (3')	5034-0309
1220mm (4')	5034-0312
1600mm (5' 3")	5034-0316
1830mm (6')	5034-0318
2145mm (7')	5034-0321
2435mm (8')	5034-0324
3050mm (10')	5034-0331
3200mm (10' 6")	5034-0332
3660mm (12')	5034-0336
4000mm (13')	5034-0340
4800mm (15' 8")	5034-0348

SMALL HOLE DRILLING

R25 & R28 (1" & 1 1/8" ROPE THREAD)

CROSS BIT

	DIA Ø (D) mm	CARBIDE WIDTH	CARBIDE HEIGHT	FACE FLUSHING	SIDE FLUSHING	GAUGE ANGLE	R25 CAT. NUMBER	R28 CAT. NUMBER
	35	8mm	11mm	1 x 5mm	4 x 5mm	N/A	4625-0335	N/A
	38	8mm	11mm	1 x 5mm	4 x 5mm	N/A	4625-0338	4628-0338
	41	8mm	14mm	1 x 5.5mm	4 x 5mm	N/A	4625-0341	4628-0341
	45	9mm	14mm	1 x 5.5mm	4 x 5mm	N/A	4625-0345	4628-0345
	48	9mm	14mm	1 x 5.5mm	4 x 5mm	N/A	N/A	4628-0348

CROSS FLUSH

	DIA Ø (D) mm	GAUGE CARBIDES	FACE CARBIDES	FACE FLUSHING	SIDE FLUSHING	GAUGE ANGLE	R25 CAT. NUMBER	R28 CAT. NUMBER
	38	6 x 8mm	2 x 6.5mm	2 x 6mm	1 x 6mm	30	4725-1038	N/A
	41	6 x 8mm	2 x 8mm	2 x 6mm	1 x 6mm	30	4725-1041	N/A
	43	6 x 8mm	2 x 8mm	2 x 6mm	1 x 6mm	30	4725-1043	N/A
	45	6 x 9mm	2 x 8mm	2 x 6mm	1 x 6mm	30	4725-1045	N/A
	48	6 x 9mm	2 x 9mm	2 x 6mm	1 x 6mm	30	4725-1048	N/A
	51	6 x 10mm	2 x 9mm	2 x 6mm	1 x 6mm	40	4725-1051	N/A


FLAT FACE BIT

	DIA Ø (D) mm	GAUGE CARBIDES	FACE CARBIDES	FACE FLUSHING	SIDE FLUSHING	GAUGE ANGLE	R25 CAT. NUMBER	R28 CAT. NUMBER
	33	5 x 8mm	2 x 6.5mm	1 x 5mm	2 x 5mm	30	4725-2033	N/A
	35	5 x 9mm	2 x 6.5mm	1 x 5mm	2 x 5mm	30	4725-2035	N/A
	38	5 x 9mm	2 x 6.5mm	1 x 5mm	2 x 5mm	30	4725-2038	4728-2038
	41	5 x 10mm	2 x 8mm	1 x 6mm	2 x 6mm	30	4725-2041	4728-2041
	43	5 x 10mm	2 x 8mm	1 x 6mm	2 x 6mm	30	4725-2043	4728-2043
	45	5 x 11mm	2 x 9mm	1 x 6mm	2 x 6mm	30	4725-2045	4728-2045
	48	5 x 11mm	2 x 9mm	1 x 6mm	2 x 6mm	30	4725-2048	N/A
	51	5 x 12mm	2 x 10mm	1 x 6mm	2 x 6mm	30	4725-2051	N/A

GROOVED FACE BIT

	DIA Ø (D) mm	GAUGE CARBIDES	FACE CARBIDES	FACE FLUSHING	SIDE FLUSHING	GAUGE ANGLE	R25 CAT. NUMBER	R28 CAT. NUMBER
	43	6 x 9mm	3 x 8mm	3 x 5mm	2 x 6mm	30	4725-3043	N/A
	45	6 x 9mm	3 x 8mm	3 x 5mm	0	30	4725-3045	N/A
	48	6 x 10mm	3 x 8mm	3 x 5mm	0	35	4725-3048	N/A
	51	6 x 10mm	3 x 9mm	3 x 6mm	0	30	4725-3051	N/A

COUPLINGS

	DIA Ø (D) mm	LENGTH (L) mm	DESCRIPTION	CAT. NUMBER
	35mm (1 3/8")	150mm (5 7/8")	R25 S/B COUPLING	5525-0001

SMALL HOLE DRILLING**R25 (1" ROPE THREAD)****SHANKED RODS 108 X 22mm (4¼" x ⅞") SHANK - 22mm HEX BODY**

EFFECTIVE LENGTH (L) mm	CAT. NUMBER
610mm (2') B/C	5425-2203-06
915mm (3') B/C	5425-2203-09
1220mm (4') B/C	5425-2203-12
1525mm (5') B/C	5425-2203-15
1830mm (6') B/C	5425-2203-18
2440mm (8') B/C	5425-2203-24
3050mm (10') B/C	5425-2203-31
3660mm (12') B/C	5425-2203-37
4000mm (13') B/C	5425-2203-40

SHANKED RODS 108 X 25mm (4¼" x 1") SHANK - 25mm HEX BODY

EFFECTIVE LENGTH (L) mm	CAT. NUMBER
610mm (2') B/C	5425-2503-06
800mm (2' 7") B/C	5425-2503-08
1220mm (4') B/C	5425-2503-12
1830mm (6') B/C	5425-2503-18
2440mm (8') B/C	5425-2503-24
3050mm (10') B/C	5425-2503-31
3200mm (10' 5") B/C	5425-2503-32
3660mm (12') B/C	5425-2503-37
4000mm (13') B/C	5425-2503-40

DUAL DRIVE SHANKED RODS 108 X 25mm (4¼" x 1") SHANK - 25mm HEX BODY

DUAL DRIVE SHANK RODS ARE DESIGNED AND PATENTED BY P&V




EFFECTIVE LENGTH (L) mm	CAT. NUMBER
2440mm (8') B/C	5425-2503-24DD
3050mm (10') B/C	5425-2503-31DD
3200mm (10' 5") B/C	5425-2503-32DD
3660mm (12') B/C	5425-2503-37DD
3720mm (12' 2") B/C	5425-2503-38DD

TUNNELLING AND DRIFTING

THREAD SIZES R32/R25, R32/R28

COUPLINGS

	DIA Ø (D) mm	LENGTH (L) mm	DESCRIPTION	CAT. NUMBER
	45mm (1 3/4")	159mm (6 1/4")	R32 SEMI-BRIDGE	5532-0001

R32/R25 - 25mm (1") - HEX BODY


Ø 9.0mm Flushing hole



EFFECTIVE LENGTH (L) mm	CAT. NUMBER
2020mm (6' 7 1/2")	5732-2525-21
2480mm (8' 1 1/2")	5732-2525-25
2630mm (8' 8")	5732-2525-26
2900mm (9' 6")	5732-2525-29
3090mm (10' 1 1/2")	5732-2525-31
3700mm (12' 1 1/2")	5732-2525-37
4300mm (14' 1 1/2")	5732-2525-43

R32/R28 - 28mm (1 1/8") - HEX BODY

Ø 9.0mm Flushing hole



EFFECTIVE LENGTH (L) mm	CAT. NUMBER
2480mm (8' 1 1/2")	5732-2828-25
2630mm (9' 11")	5732-2828-26
2785mm (9' 1 3/4")	5732-2828-28
3090mm (10' 1 1/2")	5732-2828-31
3700mm (12' 1 1/2")	5732-2828-37
4300mm (14' 1 1/2")	5732-2828-43

TUNNELLING AND DRIFTING

THREAD SIZES R32/R35

R32 & R35 - CROSS FLUSH

	DIA Ø (D) mm	GAUGE CARBIDES	FACE CARBIDES	FACE FLUSHING	SIDE FLUSHING	GAUGE ANGLE	R32 CAT. NUMBER	R35 CAT. NUMBER
	45	4 x 11mm	2 x 9mm	2 x 5mm	2 x 7mm	30	4732-1045	N/A
	48	4 x 11mm	2 x 10mm	2 x 6mm	2 x 7mm	30	4732-1048	N/A
	51	4 x 11mm	2 x 11mm	2 x 6mm	2 x 7mm	40	4732-1051	N/A

R32 & R35 - FLAT FACE

	DIA Ø (D) mm	GAUGE CARBIDES	FACE CARBIDES	FACE FLUSHING	SIDE FLUSHING	GAUGE ANGLE	R32 CAT. NUMBER	R35 CAT. NUMBER
	41	5 x 10mm	2 x 8mm	1 x 6mm	2 x 6mm	30	4732-2041	N/A
	43	5 x 10mm	2 x 8mm	1 x 6mm	2 x 6mm	30	4732-2043	N/A
	45	5 x 11mm	2 x 9mm	1 x 6mm	2 x 6mm	30	4732-2045	N/A
	48	5 x 11mm	2 x 9mm	1 x 6mm	2 x 6mm	30	4732-2048	4735-2048
	51	5 x 12mm	2 x 10mm	1 x 6mm	2 x 6mm	30	4732-2051	4735-2051
	54	6 x 11mm	3 x 9mm	3 x 6mm	0	35	4732-2054	4735-2054
	57	6 x 11mm	3 x 10mm	1 x 7mm	2 x 7mm	35	4732-2057	4735-2057
	64	6 x 12mm	3 x 10mm	1 x 9mm	1 x 9mm	30	4732-2064	4735-2064
	76	6 x 12mm	5 x 11mm	1 x 8mm	2 x 8mm	35	4732-2076	4735-2076

R32 & R35 - NINJA

	DIA Ø (D) mm	GAUGE CARBIDES	FACE CARBIDES	FACE FLUSHING	SIDE FLUSHING	GAUGE ANGLE	R32 CAT. NUMBER	R35 CAT. NUMBER
	43	6 x 9mm	3 x 8mm	3 x 5mm	2 x 6mm	30	4732-3043	N/A
	45	6 x 9mm	3 x 8mm	3 x 5mm	2 x 6mm	30	4732-3045	N/A
	48	6 x 10mm	3 x 8mm	3 x 5mm	2 x 6mm	35	4732-3048	4735-3048
	51	6 x 10mm	3 x 9mm	3 x 6mm	2 x 6mm	30	4732-3051	4735-3051
	54	6 x 10mm	3 x 9mm	3 x 6mm	2 x 6mm	35	4732-3054	4735-3054
	57	6 x 11mm	3 x 10mm	3 x 6mm	2 x 6mm	35	4732-3057	4735-3057
	64	6 x 12mm	3 x 11mm	3 x 6mm	2 x 6mm	30	4732-3064	4735-3064

NOTE: Ninja only available in 48-64 diameter

R32 & R35 - FLAT FACE SPECIAL

	DIA Ø (D) mm	GAUGE CARBIDES	FACE CARBIDES	FACE FLUSHING	SIDE FLUSHING	GAUGE ANGLE	R32 CAT. NUMBER	R35 CAT. NUMBER
	43	6 x 10mm	3 x 8mm	3 x 5mm	2 x 6mm	35	4732-2143	NA
	45	6 x 10mm	3 x 8mm	3 x 5mm	2 x 6mm	35	4732-2145	NA
	48	6 x 10mm	3 x 9mm	3 x 5mm	2 x 6mm	35	4732-2148	4735-2148
	51	6 x 10mm	3 x 10mm	3 x 6mm	2 x 6mm	35	4732-2151	4735-2151

TUNNELLING AND DRIFTING

THREAD SIZES R32/R35

R32 & R35 - NINJA, RETRAC




DIA Ø (D) mm	GAUGE CARBIDES	FACE CARBIDES	FACE FLUSHING	SIDE FLUSHING	GAUGE ANGLE	R32 CAT. NUMBER	R35 CAT. NUMBER
51	6 x 10mm	3 x 9mm	3 x 6mm	2 x 6mm	30	4732-3251	4735-3251
54	6 x 10mm	3 x 9mm	3 x 6mm	2 x 6mm	35	4732-3254	4735-3254
57	6 x 11mm	3 x 10mm	3 x 6mm	2 x 6mm	35	4732-3257	4735-3257
64	6 x 12mm	3 x 11mm	3 x 6mm	2 x 6mm	30	4732-3264	4735-3264

R32 & R35 - DROP CENTRE



DIA Ø (D) mm	GAUGE CARBIDES	FACE CARBIDES	FACE FLUSHING	SIDE FLUSHING	GAUGE ANGLE	R32 CAT. NUMBER	R35 CAT. NUMBER
64	8 x 10mm	5 x 9mm	4 x 8mm	0	30	4732-4064	4735-4064


COUPLINGS



DIA Ø (D) mm	LENGTH (L) mm	DESCRIPTION	CAT. NUMBER
55	175	R38 S/B COUPLING	5538-0001
55	190	P38 S/B COUPLING	5588-0001

TUNNELLING AND DRIFTING**THREAD SIZES R38/R32 & P38/R32****R38/R32, 32mm (1¼") - HEX BODY**

Ø 9.0mm Flushing hole



EFFECTIVE LENGTH (L) mm	CAT. NUMBER
3090mm (10' 1½")	5738-3232-31
3700mm (12' 1½")	5738-3232-37
4300mm (14' 1½")	5738-3232-43
4915mm (16' 1½")	5738-3232-49

P38/R32, 32mm(1¼") - HEX BODY

Ø 9.0mm Flushing hole



EFFECTIVE LENGTH (L) mm	CAT. NUMBER
3090mm (10' 1½")	5788-3232-31
3700mm (12' 1½")	5788-3232-37
4300mm (14' 1½")	5788-3232-43
4915mm (16' 1½")	5788-3232-49

R38/R32, 35mm (1⅜") - HEX BODY

Ø 9.5mm Flushing hole



EFFECTIVE LENGTH (L) mm	CAT. NUMBER
3090mm (10' 1½")	5738-3532-31
3700mm (12' 1½")	5738-3532-37
4300mm (14' 1½")	5738-3532-43
4915mm (16' 1½")	5738-3532-49
5525mm (18' 1½")	5738-3532-55

P38/R32, 35mm (1⅜") - HEX BODY

Ø 9.5mm Flushing hole



EFFECTIVE LENGTH (L) mm	CAT. NUMBER
3090mm (10' 1½")	5788-3532-31
3700mm (12' 1½")	5788-3532-37
4300mm (14' 1½")	5788-3532-43
4915mm (16' 1½")	5788-3532-49
5525mm (18' 1½")	5788-3532-55
6135mm (20' 1½")	5788-3532-61
6440mm (21' 1½")	5788-3532-64

P38/R32, DUAL DRIVE 35mm (1⅜") - HEX BODY

Ø 9.5mm Flushing hole



EFFECTIVE LENGTH (L) mm	CAT. NUMBER
3090mm (10' 1½")	5788-3532-31DD
3700mm (12' 1½")	5788-3532-37DD
4300mm (14' 1½")	5788-3532-43DD
4915mm (16' 1½")	5788-3532-49DD
5525mm (18' 1½")	5788-3532-55DD
6135mm (20' 1½")	5788-3532-61DD
6440mm (21' 1½")	5788-3532-64DD

TUNNELLING AND DRIFTING

THREAD SIZES P38/R32

P38 FEM./R32MALE, 35mm (1 $\frac{3}{8}$ ") - HEX BODY


Ø 9.5mm Flushing hole



EFFECTIVE LENGTH (L) mm	CAT. NUMBER
3100mm (10' 1 $\frac{1}{2}$ ")	5788-3532-31MF
3700mm (12' 1 $\frac{1}{2}$ ")	5788-3532-37MF
4305mm (14' 1 $\frac{1}{2}$ ")	5788-3532-43MF
4915mm (16' 1 $\frac{1}{2}$ ")	5788-3532-49MF
5525mm (18' 1 $\frac{1}{2}$ ")	5788-3532-55MF
6440mm (21' 1 $\frac{1}{2}$ ")	5788-3532-64MF

P38/R32, 39mm (1 $\frac{7}{32}$ ") - ROUND BODY

Ø 12mm Flushing hole



EFFECTIVE LENGTH (L) mm	CAT. NUMBER
3700mm (12' 1 $\frac{1}{2}$ ")	5688-3932-37
4305mm (14' 1 $\frac{1}{2}$ ")	5688-3932-43
4915mm (16' 1 $\frac{1}{2}$ ")	5688-3932-49
5525mm (18' 1 $\frac{1}{2}$ ")	5688-3932-55
6135mm (20' 1 $\frac{1}{2}$ ")	5688-3932-61
6440mm (21' 1 $\frac{1}{2}$ ")	5688-3932-64


P38 FEM./R32 MALE, 39mm (1 $\frac{7}{32}$ ") - ROUND BODY

Ø 12mm Flushing hole



EFFECTIVE LENGTH (L) mm	CAT. NUMBER
3700mm (12' 1 $\frac{1}{2}$ ")	5888-3932-37MF
4305mm (14' 1 $\frac{1}{2}$ ")	5888-3932-43MF
4915mm (16' 1 $\frac{1}{2}$ ")	5888-3932-49MF
5525mm (18' 1 $\frac{1}{2}$ ")	5888-3932-55MF
6135mm (20' 1 $\frac{1}{2}$ ")	5888-3932-61MF
6440mm (21' 1 $\frac{1}{2}$ ")	5888-3932-64MF

COUPLINGS



DIA Ø (D) mm	LENGTH (L) mm	DESCRIPTION	CAT. NUMBER
55	175	R38 S/B COUPLING	5538-0001
55	190	P38 S/B COUPLING	5588-0001

TUNNELLING AND DRIFTING

THREAD SIZES R38/R35 & P38/R35

R38/R35, 35mm (1³/₈") - HEX BODY

Ø 9.5mm Flushing hole



LENGTH (L) mm	CAT. NUMBER
4300mm (14' 1 ¹ / ₂ ")	5738-3535-43
4915mm (16' 1 ¹ / ₂ ")	5738-3535-49
5525mm (18' 1 ¹ / ₂ ")	5738-3535-55
6135mm (20' 1 ¹ / ₂ ")	5738-3535-61

P38/R35, 35mm (1³/₈") - HEX BODY

Ø 9.5mm Flushing hole



LENGTH (L) mm	CAT. NUMBER
3700mm (12' 1 ¹ / ₂ ")	5788-3535-37
4300mm (14' 1 ¹ / ₂ ")	5788-3535-43
4915mm (16' 1 ¹ / ₂ ")	5788-3535-49
5525mm (18' 1 ¹ / ₂ ")	5788-3535-55
6135mm (20' 1 ¹ / ₂ ")	5788-3535-61
6440mm (21' 1 ¹ / ₂ ")	5788-3535-64

P38 FEMALE/R35 MALE, 35mm (1³/₈") - HEX BODY


Ø 9.5mm Flushing hole



LENGTH (L) mm	CAT. NUMBER
4300mm (14' 1 ¹ / ₂ ")	5788-3535-43MF
4915mm (16' 1 ¹ / ₂ ")	5788-3535-49MF
5525mm (18' 1 ¹ / ₂ ")	5788-3535-55MF
6135mm (20' 1 ¹ / ₂ ")	5788-3535-61MF
6400mm (21')	5788-3535-64MF

P38/R35, 39mm (1¹7/₃₂") - ROUND BODY

Ø 14mm Flushing hole



LENGTH (L) mm	CAT. NUMBER
4300mm (14' 1 ¹ / ₂ ")	5688-3935-43
4915mm (16' 1 ¹ / ₂ ")	5688-3935-49
5525mm (18' 1 ¹ / ₂ ")	5688-3935-55
6135mm (20' 1 ¹ / ₂ ")	5688-3935-61

P38 FEMALE/R35 MALE, 39mm (1¹7/₃₂") - ROUND BODY

Ø 14mm Flushing hole



LENGTH (L) mm	CAT. NUMBER
3700mm (12' 1 ¹ / ₂ ")	5888-3935-37MF
4300mm (14' 1 ¹ / ₂ ")	5888-3935-43MF
4915mm (16' 1 ¹ / ₂ ")	5888-3935-49MF
5525mm (18' 1 ¹ / ₂ ")	5888-3935-55MF
6135mm (20' 1 ¹ / ₂ ")	5888-3935-61MF

FOR HELP IN FINDING THE RIGHT PRODUCT FOR YOU, CALL +44-1246-299100

P&V
Padley & Venables

PAGE
15

REAMING EQUIPMENT

THREAD SIZES R25/R28/R32/R35**PILOT ADAPTERS T.C. TIPPED HEAD, 26mm - 6° TAPER**

	THREAD	DIAMETER	CAT. NUMBER
	R25	D=26mm	4250-2526
	R28	D=26mm	4250-2826
	R32	D=26mm	4250-3226

REAMING BITS, BUTTON - 6° TAPER

	DIA Ø (D) mm	GAUGE CARBIDES	FACE CARBIDES	GAUGE ANGLE	CAT. NUMBER
	64	6 x 10mm	3 x 9mm	35°	4700-1364
	76	8 x 11mm	4 x 10mm	35°	4700-1376
	89	8 x 12mm	4 x 10mm	35°	4700-1389


PILOT ADAPTERS T.C. TIPPED HEAD, 40mm - 12° TAPER

	THREAD	DIAMETER Ø (D) mm	CAT. NUMBER
	R32	40mm	4250-3240
	R35	40mm	4250-3540

PILOT ADAPTERS 12° - WITH MALE THREAD

	THREAD	CAT. NUMBER
	R32	4250-3232M
	R35	4250-3535M

REAMING BITS, BUTTON - 12° TAPER

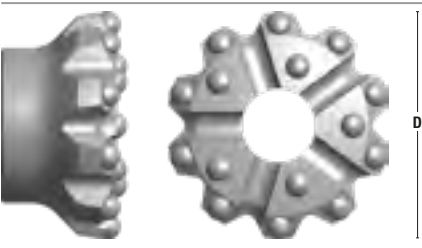	DIA Ø (D) mm	GAUGE CARBIDES	FACE CARBIDES	GAUGE ANGLE	CAT. NUMBER
	89	8 x 12mm	4 x 10mm	35°	4700-1689
	102	8 x 12mm	4 x 11mm	35°	4700-1602
	127	10 x 14mm	5 x 14mm	35°	4700-1627

REAMING EQUIPMENT**THREAD SIZES R32/R35****THREADED REAM BITS**

	DIA Ø (D) mm	GAUGE CARBIDES	PILOT CARBIDES	FACE FLUSHING	SIDE FLUSHING	GAUGE ANGLE	R32 CAT. NUMBER	R35 CAT. NUMBER
  D	76	8 x 12mm	3 x 10mm	4 x 8mm	2	35	4732-5276-38	N/A
	89	8 x 12mm	3 x 10mm	4 x 8mm	2	35	4732-5289-38	4735-5289-38
	102	12 x 12mm	3 x 10mm	4 x 8mm	2	35	4732-5202-38	4735-5202-38
	115	15 x 14mm	3 x 10mm	4 x 8mm	2	35	N/A	4735-5215-38
	127	15 x 14mm	3 x 10mm	4 x 8mm	2	35	N/A	4735-5227-38

THREADED REAM BITS (MUSHROOM TYPE)

	DIA Ø (D) mm	GAUGE CARBIDES	PILOT CARBIDES	FACE FLUSHING	SIDE FLUSHING	GAUGE ANGLE	R32 CAT. NUMBER	R35 CAT. NUMBER
  D	76	8 x 12mm	6 x 12mm	4 x 8mm	2	35°	4732-5076	4735-5076
	89	8 x 12mm	6 x 12mm	4 x 8mm	2	35°	4732-5089	4735-5089
	102	9 x 12mm	8 x 12mm	4 x 8mm	2	35°	4732-5002	4735-5002

FOR HELP IN FINDING THE RIGHT PRODUCT FOR YOU, CALL +44-1246-299100

EXTENSION DRILLING EQUIPMENT

THREAD SIZES R25

CROSS BIT



DIA Ø (D) mm	CARBIDE WIDTH	CARBIDE HEIGHT	FACE FLUSHING	SIDE FLUSHING	GAUGE ANGLE	R25 CAT. NUMBER
35	8mm	11mm	4 x 5mm	1 x 5mm	N/A	4625-0335
38	8mm	11mm	4 x 5mm	1 x 5mm	N/A	4625-0338
41	8mm	14mm	4 x 5mm	1 x 5.5mm	N/A	4625-0341
45	9mm	14mm	4 x 5mm	1 x 5.5mm	N/A	4625-0345

CROSS FLUSH



DIA Ø (D) mm	GAUGE CARBIDES	FACE CARBIDES	FACE FLUSHING	SIDE FLUSHING	GAUGE ANGLE	R25 CAT. NUMBER
38	6 x 8mm	2 x 6.5mm	2 x 6mm	1 x 6mm	30	4725-1038
41	6 x 8mm	2 x 8mm	2 x 6mm	1 x 6mm	30	4725-1041
43	6 x 8mm	2 x 8mm	2 x 6mm	1 x 6mm	30	4725-1043
45	6 x 9mm	2 x 8mm	2 x 6mm	1 x 6mm	30	4725-1045
48	6 x 9mm	2 x 9mm	2 x 6mm	1 x 6mm	30	4725-1048
51	6 x 10mm	2 x 9mm	2 x 6mm	1 x 6mm	40	4725-1051

FLAT FACE BIT



DIA Ø (D) mm	GAUGE CARBIDES	FACE CARBIDES	FACE FLUSHING	SIDE FLUSHING	GAUGE ANGLE	R25 CAT. NUMBER
33	5 x 8mm	2 x 6.5mm	1 x 5mm	2 x 5mm	30	4725-2033
35	5 x 9mm	2 x 6.5mm	1 x 5mm	2 x 5mm	30	4725-2035
38	5 x 9mm	2 x 6.5mm	1 x 5mm	2 x 5mm	30	4725-2038
41	5 x 10mm	2 x 8mm	1 x 6mm	2 x 6mm	30	4725-2041
43	5 x 10mm	2 x 8mm	1 x 6mm	2 x 6mm	30	4725-2043
45	5 x 11mm	2 x 9mm	1 x 6mm	2 x 6mm	30	4725-2045
48	5 x 11mm	2 x 9mm	1 x 6mm	2 x 6mm	30	4725-2048
51	5 x 12mm	2 x 10mm	1 x 6mm	2 x 6mm	30	4725-2051

GROOVED FACE BIT




DIA Ø (D) mm	GAUGE CARBIDES	FACE CARBIDES	FACE FLUSHING	SIDE FLUSHING	GAUGE ANGLE	R25 CAT. NUMBER
45	6 x 9mm	3 x 8mm	3 x 5mm	0	30	4725-3045
48	6 x 10mm	3 x 8mm	3 x 5mm	0	35	4725-3048
51	6 x 10mm	3 x 9mm	3 x 6mm	0	30	4725-3051

EXTENSION DRILLING EQUIPMENT


THREAD SIZES R25

COUPLINGS

	DIAMETER Ø (D) mm	LENGTH (L) mm	DESCRIPTION	CAT. NUMBER
	35mm	149mm	SEMI-BRIDGE	5525-0001

R25 EXTENSION RODS

Ø 9.0mm Flushing hole



LENGTH (L) mm	CAT. NUMBER
610mm (2')	5725-2506
915mm (3')	5725-2509
1220mm (4')	5725-2512
1525mm (5')	5725-2515
1830mm (6')	5725-2518
2435mm (8')	5725-2524
3050mm (10')	5725-2531
3660mm (12')	5725-2536

R25 MALE/FEMALE EXTENSION RODS

Ø 9.0mm Flushing hole



LENGTH (L) mm	CAT. NUMBER
610mm (2')	5725-2506MF
915mm (3')	5725-2509MF
1220mm (4')	5725-2512MF
1525mm (5')	5725-2515MF
1830mm (6')	5725-2518MF
2435mm (8')	5725-2524MF
3050mm (10')	5725-2531MF
3660mm (12')	5725-2536MF

FOR HELP IN FINDING THE RIGHT PRODUCT FOR YOU, CALL +44-1246-299100

P&V
Padley & Venables

PAGE
19

R32 EXTENSION DRILLING EQUIPMENT

THREAD SIZES R32

R32 - CROSS FLUSH

	DIA Ø (D) mm	GAUGE CARBIDES	FACE CARBIDES	FACE FLUSHING	SIDE FLUSHING	GAUGE ANGLE	R32 CAT. NUMBER
	48	6 x 9mm	2 x 9mm	2 x 6mm	1 x 6mm	30	4732-1048
	51	6 x 10mm	2 x 9mm	2 x 6mm	1 x 6mm	40	4732-1051

R32 - FLAT FACE

	DIA Ø (D) mm	GAUGE CARBIDES	FACE CARBIDES	FACE FLUSHING	SIDE FLUSHING	GAUGE ANGLE	R32 CAT. NUMBER
	48	5 x 11mm	2 x 9mm	1 x 6mm	2 x 6mm	30	4732-2048
	51	5 x 12mm	2 x 10mm	1 x 6mm	2 x 6mm	30	4732-2051
	54	6 x 11mm	3 x 9mm	3 x 6mm	0	35	4732-2054
	57	6 x 11mm	3 x 10mm	1 x 7mm	2 x 7mm	35	4732-2057
	64	6 x 12mm	3 x 10mm	1 x 9mm	1 x 9mm	30	4732-2064
	76	6 x 12mm	5 x 11mm	1 x 8mm	2 x 8mm	35	4732-2076

R32 - GROOVED FACE

	DIA Ø (D) mm	GAUGE CARBIDES	FACE CARBIDES	FACE FLUSHING	SIDE FLUSHING	GAUGE ANGLE	R32 CAT. NUMBER
	48	6 x 10mm	3 x 8mm	3 x 5mm	2 x 6mm	35	4732-3048
	51	6 x 10mm	3 x 9mm	3 x 6mm	2 x 6mm	30	4732-3051
	54	6 x 10mm	3 x 9mm	3 x 6mm	2 x 6mm	35	4732-3054
	57	6 x 11mm	3 x 10mm	3 x 6mm	2 x 6mm	35	4732-3057
	64	6 x 12mm	3 x 11mm	3 x 6mm	2 x 6mm	30	4732-3064

R32 - GROOVED FACE, RETRAC

	DIA Ø (D) mm	GAUGE CARBIDES	FACE CARBIDES	FACE FLUSHING	SIDE FLUSHING	GAUGE ANGLE	R32 CAT. NUMBER
	51	6 x 10mm	3 x 9mm	3 x 6mm	2 x 6mm	30	4732-3251
	54	6 x 10mm	3 x 9mm	3 x 6mm	2 x 6mm	35	4732-3254
	57	6 x 11mm	3 x 10mm	3 x 6mm	2 x 6mm	35	4732-3257
	64	6 x 12mm	3 x 11mm	3 x 6mm	2 x 6mm	30	4732-3264


R32 - DROP CENTRE

	DIA Ø (D) mm	GAUGE CARBIDES	FACE CARBIDES	FACE FLUSHING	SIDE FLUSHING	GAUGE ANGLE	R32 CAT. NUMBER
	64	6 x 12mm	4 x 9mm	3 x 8mm	0	30	4732-4064

R32 EXTENSION DRILLING EQUIPMENT

THREAD SIZES R32

COUPLINGS

	DIA Ø (D) mm	LENGTH (L) mm	DESCRIPTION	CAT. NUMBER
	45	159	SEMI-BRIDGE	5532-0001

32mm (1¼") ROUND - CARBURISED

Ø 11mm Flushing hole

	LENGTH (L) mm	CAT. NUMBER
	1220mm (4')	5632-3212C
	1525mm (5')	5632-3215C
	1830mm (6')	5632-3218C
	3050mm (10')	5632-3231C
	3660mm (12')	5632-3236C

32mm (1¼") ROUND - SURFACE HARDENED

Ø 11mm Flushing hole

	LENGTH (L) mm	CAT. NUMBER
	3050mm (10')	5632-3231SH
	3660mm (12')	5632-3236SH
	4270mm (14')	5632-3243SH

MALE/FEMALE SPEEDRODS 32mm (1¼") - ROUND

Ø 11mm Flushing hole

	LENGTH (L) mm	CAT. NUMBER
	1220mm (4')	5832-3212MF
	1525mm (5')	5832-3215MF
	1830mm (6')	5832-3218MF
	3050mm (10')	5832-3231MF
	3660mm (12')	5832-3236MF
	4270mm (14')	5832-3243MF

GUIDE TUBE

Ø 11mm Flushing hole

	DIAMETER Ø (D) mm	LENGTH (L) mm	CAT. NUMBER
	44mm	3050mm (10')	5632-4431
	44mm	3660mm (12')	5632-4436
	44mm	4270mm (14')	5632-4443

FOR HELP IN FINDING THE RIGHT PRODUCT FOR YOU, CALL +44-1246-299100

P&V
Padley & Venables

PAGE
21

P35 EXTENSION DRILLING EQUIPMENT

THREAD SIZES P35

P35 - GROOVED FACE



D

DIA Ø (D) mm	GAUGE CARBIDES	FACE CARBIDES	FACE FLUSHING	SIDE FLUSHING	GAUGE ANGLE	P35 CAT. NUMBER
48	6 x 10mm	3 x 8mm	3 x 5mm	2 x 6mm	35	4785-3048
51	6 x 10mm	3 x 9mm	3 x 6mm	2 x 6mm	30	4785-3051
54	6 x 10mm	3 x 9mm	3 x 6mm	2 x 6mm	35	4785-3054
57	6 x 11mm	3 x 10mm	3 x 6mm	2 x 6mm	35	4785-3057
64	6 x 12mm	3 x 11mm	3 x 6mm	2 x 6mm	30	4785-3064



D

76	8 x 12mm	5 x 11mm	4 x 8mm	0	35	4785-3076
----	----------	----------	---------	---	----	-----------

P35 - GROOVED FACE RETRAC



D

DIA Ø (D) mm	GAUGE CARBIDES	FACE CARBIDES	FACE FLUSHING	SIDE FLUSHING	GAUGE ANGLE	P35 CAT. NUMBER
54	6 x 10mm	3 x 9mm	3 x 6mm	2 x 6mm	35	4785-3254
57	6 x 11mm	3 x 10mm	3 x 6mm	2 x 6mm	35	4785-3257
64	6 x 12mm	3 x 11mm	3 x 6mm	2 x 6mm	30	4785-3264



D

76	8 x 12mm	5 x 11mm	4 x 8mm	0	35	4785-3276
----	----------	----------	---------	---	----	-----------

P35 MALE/FEMALE SPEEDRODS 38mm (1½") - ROUND BODY

Ø 14mm Flushing hole



Ø49

L

LENGTH (L) mm	CAT. NUMBER
1220mm (4')	5885-3812MF
1525mm (5')	5885-3815MF
1830mm (6')	5885-3818MF
3050mm (10')	5885-3831MF
3660mm (12')	5885-3836MF
4270mm (14')	5885-3843MF

P38 EXTENSION DRILLING EQUIPMENT

THREAD SIZES P38

P38 - FLAT FACE (T38)

		DIA Ø (D) mm	GAUGE CARBIDES	FACE CARBIDES	FACE FLUSHING	SIDE FLUSHING	GAUGE ANGLE	P38 CAT. NUMBER
	D	60	6 x 11mm	3 x 11mm	1 x 9mm	1 x 9mm	30	4788-2060
		64	6 x 12mm	3 x 11mm	1 x 9mm	1 x 9mm	30	4788-2064
	D	70	8 x 12mm	6 x 10mm	2 x 10mm	2 x 9mm	30	4788-2070
		76	8 x 12mm	6 x 10mm	2 x 12mm	2 x 8mm	35	4788-2076
	D	89	9 x 12mm	6 x 12mm	3 x 10mm	0	35	4788-2089
		102	9 x 14mm	6 x 12mm	3 x 11mm	0	35	4788-2002

P38 - FLAT FACE RETRAC (T38)

		DIA Ø (D) mm	GAUGE CARBIDES	FACE CARBIDES	FACE FLUSHING	SIDE FLUSHING	GAUGE ANGLE	P38 CAT. NUMBER
	D	64	6 x 12mm	3 x 11mm	1 x 9mm	1 x 9mm	30	4788-2264
	D	76	8 x 12mm	6 x 10mm	2 x 12mm	2 x 8mm	35	4788-2276
	D	89	9 x 12mm	6 x 12mm	3 x 10mm	0	35	4788-2289

FOR HELP IN FINDING THE RIGHT PRODUCT FOR YOU, CALL +44-1246-299100

P&V
Padley & Venables

PAGE
23

P38 EXTENSION DRILLING EQUIPMENT

THREAD SIZES P38

P38 - GROOVED FACE



DIA Ø (D) mm	GAUGE CARBIDES	FACE CARBIDES	FACE FLUSHING	SIDE FLUSHING	GAUGE ANGLE	P38 CAT. NUMBER
64	6 x 12mm	3 x 11mm	3 x 8mm	0	30	4788-3064



76	8 x 12mm	5 x 11mm	4 x 8mm	0	35	4788-3076
89	8 x 13mm	5 x 12mm	4 x 9mm	0	35	4788-3089

P38 - GROOVED FACE RETRAC



DIA Ø (D) mm	GAUGE CARBIDES	FACE CARBIDES	FACE FLUSHING	SIDE FLUSHING	GAUGE ANGLE	P38 CAT. NUMBER
64	6 x 12mm	3 x 11mm	3 x 8mm	0	30	4788-3264



76	8 x 12mm	5 x 11mm	4 x 8mm	0	35	4788-3276
89	8 x 13mm	5 x 12mm	4 x 9mm	0	35	4788-3289

P38 - DROP CENTRE



DIA Ø (D) mm	GAUGE CARBIDES	FACE CARBIDES	FACE FLUSHING	SIDE FLUSHING	GAUGE ANGLE	P38 CAT. NUMBER
64	8 x 10mm	5 x 9mm	4 x 8mm	0	30	4788-4064
76	8 x 12mm	5 x 11mm	4 x 8mm	0	35	4788-4076
89	8 x 14mm	6 x 12mm	4 x 9mm	0	35	4788-4089

P38 - DROP CENTRE RETRAC



DIA Ø (D) mm	GAUGE CARBIDES	FACE CARBIDES	FACE FLUSHING	SIDE FLUSHING	GAUGE ANGLE	P38 CAT. NUMBER
64	8 x 10mm	5 x 9mm	4 x 8mm	0	30	4788-4264
76	8 x 12mm	5 x 11mm	4 x 8mm	0	35	4788-4276
89	8 x 14mm	6 x 12mm	4 x 9mm	0	35	4788-4289

P38 - REAM BITS




DIA Ø (D) mm	GAUGE CARBIDES	FACE CARBIDES	FACE FLUSHING	SIDE FLUSHING	GAUGE ANGLE	P38 CAT. NUMBER
127	15 x 14mm	0	3 x 16mm	0	35	4788-5227-51
152	18 x 14mm	0	3 x 16mm	0	35	4788-5252-60

P38 EXTENSION DRILLING EQUIPMENT


THREAD SIZES P38

COUPLINGS

	DIA Ø (D) mm	LENGTH (L) mm	DESCRIPTION	CAT. NUMBER
	55	190	SEMI-BRIDGE	5588-0001

32mm (1¼") - HEXAGON


Ø 12mm Flushing hole



LENGTH (L) mm	CAT. NUMBER
3050mm (10')	5788-3231
3660mm (12')	5788-3236
4000mm (13')	5788-3240

38mm (1½") ROUND - CARBURISED


Ø 14mm Flushing hole



LENGTH (L) mm	CAT. NUMBER
1220mm (4')	5688-3812C
1525mm (5')	5688-3815C
1830mm (6')	5688-3818C
3050mm (10')	5688-3831C
3660mm (12')	5688-3836C
4270mm (14')	5688-3843C
4905mm (16')	5688-3849C

38mm (1½") ROUND - SURFACE HARDENED

Ø 14mm Flushing hole



LENGTH (L) mm	CAT. NUMBER
3050mm (10')	5688-3831SH
3660mm (12')	5688-3836SH
4270mm (14')	5688-3843SH
4905mm (16')	5688-3849SH

MALE/FEMALE SPEEDRODS 38mm (1½") - ROUND

Ø 14mm Flushing hole



LENGTH (L) mm	CAT. NUMBER
1220mm (4')	5888-3812MF
1525mm (5')	5888-3815MF
1830mm (6')	5888-3818MF
3050mm (10')	5888-3831MF
3660mm (12')	5888-3836MF
4270mm (14')	5888-3843MF

FOR HELP IN FINDING THE RIGHT PRODUCT FOR YOU, CALL +44-1246-299100

P&V
Padley & Venables

PAGE
25

P38 EXTENSION DRILLING EQUIPMENT

THREAD SIZES P38


GUIDE TUBES

Ø 14mm Flushing hole / dia. 55mm



LENGTH (L) mm	CAT. NUMBER
1220mm (4')	5688-5512
1525mm (5')	5688-5515
1830mm (6')	5688-5518
2440mm (8')	5688-5524
3050mm (10')	5688-5531
3660mm (12')	5688-5536

Ø 14mm Flushing hole / dia. 64mm



1830mm (6')	5688-6418
2440mm (8')	5688-6424
3660mm (12')	5688-6436

LONG HOLE DRILLING TOOLS - SHOULDER DRIVE TUBES

Ø 14mm Flushing hole / dia. 55mm



LENGTH (L) mm	CAT. NUMBER
1525mm (5')	5688-5515SD
1830mm (6')	5688-5518SD

P45/P51 EXTENSION DRILLING EQUIPMENT

THREAD SIZES P45/P51

P45 (T45) & P51(T51) - FLAT FACE

		DIA Ø (D) mm	GAUGE CARBIDES	FACE CARBIDES	FACE FLUSHING	SIDE FLUSHING	GAUGE ANGLE	P45 CAT. NUMBER	P51 CAT. NUMBER
	D	70	8 x 12mm	6 x 10mm	2 x 10mm	2 x 9mm	35	4795-2070	N/A
		76	8 x 12mm	6 x 10mm	2 x 12mm	2 x 8mm	35	4795-2076	N/A
	D	89	9 x 12mm	6 x 12mm	3 x 10mm	0	35	4795-2089	4799-2089
		102	9 x 14mm	6 x 12mm	3 x 11mm	0	35	4795-2002	4799-2002
		115	9 x 14mm	9 x 12mm	3 x 11mm	0	35	4795-2015	4799-2015
	D	127	10 x 14mm	10 x 12mm	5 x 11mm	0	35	N/A	4799-2027

P45 (T45) & P51(T51) - FLAT FACE RETRAC

		DIA Ø (D) mm	GAUGE CARBIDES	FACE CARBIDES	FACE FLUSHING	SIDE FLUSHING	GAUGE ANGLE	P45 CAT. NUMBER	P51 CAT. NUMBER
	D	76	8 x 12mm	6 x 10mm	2 x 12mm	2 x 8mm	35	4795-2276	N/A
	D	89	9 x 12mm	6 x 12mm	3 x 10mm	0	35	4795-2289	4799-2289
		102	9 x 14mm	6 x 12mm	3 x 11mm	0	35	4795-2202	4799-2202
		115	9 x 14mm	9 x 12mm	3 x 11mm	0	35	4795-2215	4799-2215
	D	127	10 x 14mm	10 x 12mm	5 x 11mm	0	35	NA	4799-2227

FOR HELP IN FINDING THE RIGHT PRODUCT FOR YOU, CALL +44-1246-299100

P&V
Padley & Venables

PAGE
27

P45/P51 EXTENSION DRILLING EQUIPMENT

THREAD SIZES P45/P51

P45 (T45) & P51(T51) - GROOVED FACE

		DIA Ø (D) mm	GAUGE CARBIDES	FACE CARBIDES	FACE FLUSHING	SIDE FLUSHING	GAUGE ANGLE	P45 CAT. NUMBER	P51 CAT. NUMBER
		76	8 x 12mm	5 x 11mm	4 x 8mm	0	35	4795-3076	N/A
		89	8 x 13mm	5 x 12mm	4 x 9mm	0	35	4795-3089	4799-3089
		102	9 x 14mm	6 x 12mm	3 x 11mm	0	35	4795-3002	4799-3002
		115	9 x 14mm	9 x 12mm	4 x 11mm	0	35	4795-3015	4799-3015
		127	10 x 14mm	10 x 12mm	5 x 11mm	0	35	NA	4799-3027

P45 (T45) & P51(T51) - GROOVED FACE RETRAC

		DIA Ø (D) mm	GAUGE CARBIDES	FACE CARBIDES	FACE FLUSHING	SIDE FLUSHING	GAUGE ANGLE	P45 CAT. NUMBER	P51 CAT. NUMBER
		76	8 x 12mm	5 x 11mm	4 x 8mm	0	35	4795-3276	N/A
		89	8 x 13mm	5 x 12mm	4 x 9mm	0	35	4795-3289	4799-3289
		102	9 x 14mm	6 x 12mm	3 x 11mm	0	35	4795-3202	4799-3202
		115	9 x 14mm	9 x 12mm	4 x 11mm	0	35	4795-3215	4799-3215
		127	10 x 14mm	10 x 12mm	5 x 11mm	0	35	NA	4799-3227


P45/P51 EXTENSION DRILLING EQUIPMENT

THREAD SIZES P45/P51

P45 (T45) & P51(T51) - DROP CENTRE

		DIA Ø (D) mm	GAUGE CARBIDES	FACE CARBIDES	FACE FLUSHING	SIDE FLUSHING	GAUGE ANGLE	P45 CAT. NUMBER	P51 CAT. NUMBER
	D	76	8 x 12mm	5 x 11mm	4 x 8mm	0	35	4795-4076	NA
		89	8 x 14mm	6 x 12mm	4 x 9mm	0	35	4795-4089	4799-4089
	D	102	9 x 14mm	9 x 12mm	3 x 10mm	0	35	4795-4002	4799-4002
	D	115	9 x 14mm	9 x 12mm	4 x 11mm	0	35	4795-4015	4799-4015
	D	127	10 x 14mm	10 x 12mm	5 x 11mm	0	35	NA	4799-4027

P45 (T45) & P51(T51) - DROP CENTRE RETRAC

		DIA Ø (D) mm	GAUGE CARBIDES	FACE CARBIDES	FACE FLUSHING	SIDE FLUSHING	GAUGE ANGLE	P45 CAT. NUMBER	P51 CAT. NUMBER
	D	76	8 x 12mm	5 x 11mm	4 x 8mm	0	35	4795-4276	NA
		89	8 x 14mm	6 x 12mm	4 x 9mm	0	35	4795-4289	4799-4289
	D	102	9 x 14mm	9 x 12mm	3 x 10mm	0	35	4795-4202	4799-4202
	D	115	9 x 14mm	9 x 12mm	4 x 11mm	0	35	4795-4215	4799-4215
	D	127	10 x 14mm	10 x 12mm	5 x 11mm	0	35	NA	4799-4227

P45 (T45) - REAM BITS

		DIA (D) mm	GAUGE CARBIDES	FACE CARBIDES	FACE FLUSHING	SIDE FLUSHING	GAUGE ANGLE	P45 CAT. NUMBER
	D	127	15 x 14mm	0	3 x 16mm	0	30	4795-5227-67
		152	18 x 14mm	0	3 x 16mm	0	35	4795-5252-67

FOR HELP IN FINDING THE RIGHT PRODUCT FOR YOU, CALL +44-1246-299100


P&V
Padley & Venables

PAGE
29

P45 EXTENSION DRILLING EQUIPMENT


THREAD SIZES P45

COUPLINGS

	DIA Ø (D) mm	LENGTH (L) mm	DESCRIPTION	CAT. NUMBER
	63	207	SEMI-BRIDGE	5595-0001

45mm (1¾") ROUND - CARBURISED


Ø 16mm Flushing hole



LENGTH (L) mm	CAT. NUMBER
1220mm (4')	5695-4512C
1525mm (5')	5695-4515C
1830mm (6')	5695-4518C
3050mm (10')	5695-4531C
3660mm (12')	5695-4536C
4265mm (14')	5695-4543C
6095mm (20')	5695-4561C

45mm (1¾") ROUND - SURFACE HARDENED

Ø 16mm Flushing hole



LENGTH (L) mm	CAT. NUMBER
3050mm (10')	5695-4531SH
3660mm (12')	5695-4536SH
4265mm (14')	5695-4543SH
6095mm (20')	5695-4561SH

MALE/FEMALE SPEEDRODS 45mm (1¾") - ROUND

Ø 16mm Flushing hole




LENGTH (L) mm	CAT. NUMBER
1220mm (4')	5895-4512MF
1525mm (5')	5895-4515MF
1830mm (6')	5895-4518MF
3050mm (10')	5895-4531MF
3660mm (12')	5895-4536MF
4265mm (14')	5895-4543MF
6095mm (20')	5895-4561MF

P45 EXTENSION DRILLING EQUIPMENT

THREAD SIZES P45

GUIDE TUBES


Ø 16mm Flushing hole



DIAMETER Ø (D) mm	LENGTH (L) mm	CAT. NUMBER
64mm	1220mm (4')	5695-6412
64mm	1525mm (5')	5695-6415
64mm	1830mm (6')	5695-6418
64mm	3660mm (12')	5695-6436
76mm	1830mm (6')	5695-7618
76mm	3660mm (12')	5695-7636

LONG HOLE DRILLING TOOLS - SHOULDER DRIVE TUBES

Ø 16mm Flushing hole



DIAMETER Ø (D) mm	LENGTH (L) mm	CAT. NUMBER
64mm	1525mm (5')	5695-6415SD
64mm	1830mm (6')	5695-6418SD

FOR HELP IN FINDING THE RIGHT PRODUCT FOR YOU, CALL +44-1246-299100



P&V
Padley & Venables

PAGE
31

P51 EXTENSION DRILLING EQUIPMENT


THREAD SIZES P51

COUPLINGS

	DIA Ø (D) mm	LENGTH (L) mm	DESCRIPTION	CAT. NUMBER
	72	234	SEMI-BRIDGE	5599-0001
	76	234	SEMI-BRIDGE HEAVY DUTY	5599-0003

51mm (2") ROUND - CARBURISED


Ø 19mm Flushing hole



LENGTH (L) mm	CAT. NUMBER
610mm (2')	5699-5106C
1830mm (6')	5699-5118C
3050mm (10')	5699-5131C
3660mm (12')	5699-5136C
4265mm (14')	5699-5143C
4800mm (15' 9")	5699-5148C
6095mm (20')	5699-5161C

51mm (2") ROUND - SURFACE HARDENED

Ø 19mm Flushing hole



LENGTH (L) mm	CAT. NUMBER
3050mm (10')	5699-5131SH
3660mm (12')	5699-5136SH
4265mm (14')	5699-5143SH
6095mm (20')	5699-5161SH
7315mm (24')	5699-5173SH

MALE/FEMALE SPEEDRODS 51mm (2") - ROUND


Ø 19mm Flushing hole



LENGTH (L) mm	CAT. NUMBER
915mm (3')	5899-5109MF
1830mm (6')	5899-5118MF
3050mm (10')	5899-5131MF
3660mm (12')	5899-5136MF
4265mm (14')	5899-5143MF
4800mm (15' 9")	5899-5148MF
6095mm (20')	5899-5161MF

GUIDE TUBES

Ø 19mm Flushing hole

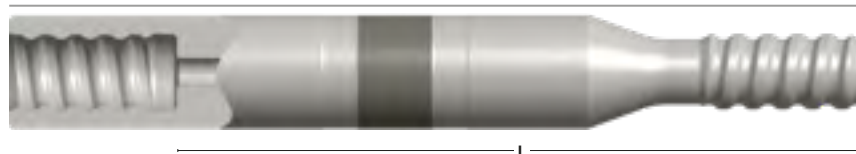

DIAMETER Ø (D) mm	LENGTH (L) mm	CAT. NUMBER
76mm	915mm (3')	5699-7609
76mm	1830mm (6')	5699-7618
76mm	3660mm (12')	5699-7636
87mm	1830mm (6')	5699-8718
87mm	3660mm (12')	5699-8736

P60 EXTENSION DRILLING EQUIPMENT

THREAD SIZES P60

P60 (ST58 BOTTOM DRIVE) - GROOVED FACE

	DIA Ø (D) mm	GAUGE CARBIDES	FACE CARBIDES	FACE FLUSHING	SIDE FLUSHING	GAUGE ANGLE	P60 CAT. NUMBER
	92	9 x 12mm	6 x 12mm	3 x 11mm	0	35	4760-3092
	102	9 x 14mm	6 x 12mm	3 x 11mm	0	35	4760-3002
	115	9 x 14mm	9 x 12mm	4 x 11mm	0	35	4760-3015
	127	10 x 14mm	10 x 12mm	5 x 11mm	0	35	4760-3027

P60 (ST58 BOTTOM DRIVE) - GROOVED FACE RETRAC

	DIA Ø (D) mm	GAUGE CARBIDES	FACE CARBIDES	FACE FLUSHING	SIDE FLUSHING	GAUGE ANGLE	P60 CAT. NUMBER
	92	9 x 12mm	6 x 12mm	3 x 11mm	0	35	4760-3292
	102	9 x 14mm	6 x 12mm	3 x 11mm	0	35	4760-3202
	115	9 x 14mm	9 x 12mm	4 x 11mm	0	35	4760-3215
	127	10 x 14mm	10 x 12mm	5 x 11mm	0	35	4760-3227

FOR HELP IN FINDING THE RIGHT PRODUCT FOR YOU, CALL +44-1246-299100

P&V
Padley & Venables

PAGE
33

P60 EXTENSION DRILLING EQUIPMENT

THREAD SIZES P60

P60 (ST58 BOTTOM DRIVE) - DROP CENTRE

	DIA Ø (D) mm	GAUGE CARBIDES	FACE CARBIDES	FACE FLUSHING	SIDE FLUSHING	GAUGE ANGLE	P60 CAT. NUMBER
	92	9 x 12mm	6 x 12mm	3 x 11mm	0	35	4760-4092
	102	9 x 14mm	9 x 12mm	3 x 11mm	0	35	4760-4002
	115	9 x 14mm	9 x 12mm	4 x 11mm	0	35	4760-4015
	127	10 x 14mm	10 x 12mm	5 x 11mm	0	35	4760-4027

P60 (ST58 BOTTOM DRIVE) - DROP CENTRE RETRAC

	DIA Ø (D) mm	GAUGE CARBIDES	FACE CARBIDES	FACE FLUSHING	SIDE FLUSHING	GAUGE ANGLE	P60 CAT. NUMBER
	102	9 x 14mm	9 x 12mm	3 x 11mm	0	35	4760-4202
	115	9 x 14mm	9 x 12mm	4 x 11mm	0	35	4760-4215
	127	10 x 14mm	10 x 12mm	5 x 11mm	0	35	4760-4227

P60 EXTENSION DRILLING EQUIPMENT

THREAD SIZES P60

P60 THREADED RODS


Ø 22mm Flushing hole



LENGTH (L) mm	CAT. NUMBER
MF ROD 3050mm	5860-6131MF
MF ROD 3660mm	5860-6136MF
MF ROD 4265mm	5860-6143MF
MF ROD 5485mm	5860-6155MF
MF ROD 6095mm	5860-6161MF

GUIDE TUBE

Ø 22mm Flushing hole

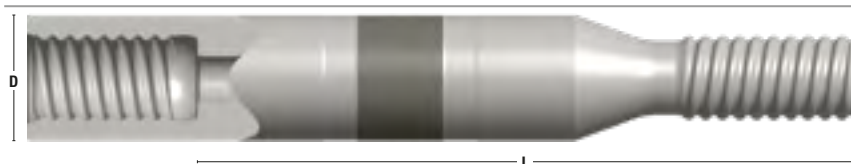

DIAMETER Ø (D) mm	LENGTH (L) mm	CAT. NUMBER
76	3660mm (12')	5660-7636
87	4265mm (14')	5660-8743

FOR HELP IN FINDING THE RIGHT PRODUCT FOR YOU, CALL +44-1246-299100

P&V
Padley & Venables

PAGE
35

CT60 EXTENSION DRILLING EQUIPMENT

THREAD SIZES CT60

CT60 - (COLLARED 'T' THREAD) GROOVED FACE

	DIA Ø (D) mm	GAUGE CARBIDES	FACE CARBIDES	FACE FLUSHING	SIDE FLUSHING	GAUGE ANGLE	CT60 CAT. NUMBER
	92	9 x 12mm	6 x 12mm	3 x 11mm	0	35	4790-3092
	102	9 x 14mm	6 x 12mm	3 x 11mm	0	35	4790-3002
	115	9 x 14mm	9 x 12mm	4 x 11mm	0	35	4790-3015
	127	10 x 14mm	10 x 12mm	5 x 11mm	0	35	4790-3027

CT60 - (COLLARED 'T' THREAD) GROOVED FACE RETRAC

	DIA Ø (D) mm	GAUGE CARBIDES	FACE CARBIDES	FACE FLUSHING	SIDE FLUSHING	GAUGE ANGLE	CT60 CAT. NUMBER
	92	9 x 12mm	6 x 12mm	3 x 11mm	0	35	4790-3292
	102	9 x 14mm	6 x 12mm	3 x 11mm	0	35	4790-3202
	115	9 x 14mm	9 x 12mm	4 x 11mm	0	35	4790-3215
	127	10 x 14mm	10 x 12mm	5 x 11mm	0	35	4790-3227

CT60 EXTENSION DRILLING EQUIPMENT

THREAD SIZES CT60

CT60 - (COLLARED 'T' THREAD) DROP CENTRE

	DIA Ø (D) mm	GAUGE CARBIDES	FACE CARBIDES	FACE FLUSHING	SIDE FLUSHING	GAUGE ANGLE	CT60 CAT. NUMBER
	92	9 x 12mm	6 x 12mm	3 x 11mm	0	35	4790-4092
	102	9 x 14mm	9 x 12mm	3 x 11mm	0	35	4790-4002
	115	9 x 14mm	9 x 12mm	4 x 11mm	0	35	4790-4015
	127	10 x 14mm	10 x 12mm	5 x 11mm	0	35	4790-4027
	127	10 x 14mm	10 x 12mm	5 x 11mm	0	35	4790-4027

CT60 - (COLLARED 'T' THREAD) DROP CENTRE RETRAC

	DIA Ø (D) mm	GAUGE CARBIDES	FACE CARBIDES	FACE FLUSHING	SIDE FLUSHING	GAUGE ANGLE	CT60 CAT. NUMBER
	102	9 x 14mm	9 x 12mm	3 x 11mm	0	35	4790-4202
	115	9 x 14mm	9 x 12mm	4 x 11mm	0	35	4790-4215
	127	10 x 14mm	10 x 12mm	5 x 11mm	0	35	4790-4227

FOR HELP IN FINDING THE RIGHT PRODUCT FOR YOU, CALL +44-1246-299100

P&V
Padley & Venables

PAGE
37

CT60 EXTENSION DRILLING EQUIPMENT

THREAD SIZES CT60

CT60 MF RODS, 82mm FEMALE

Ø 22mm Flushing hole



LENGTH (L) mm	CAT. NUMBER
MF ROD 3660mm (12')	5890-6136MF
MF ROD 4265mm (14')	5890-6143MF
MF ROD 6100mm (20' 5/32")	5890-6161MF

CT60 MF RODS, 85mm FEMALE

Ø 22mm Flushing hole



LENGTH (L) mm	CAT. NUMBER
MF ROD 3660mm (12')	5891-6136MF
MF ROD 4265mm (14')	5891-6143MF
MF ROD 6100mm (20' 5/32")	5891-6161MF

PILOT TUBE


Ø 25mm Flushing hole



DIA Ø (D) mm	LENGTH (L) mm	CAT. NUMBER
87	4265mm (14')	5890-8743-R
76	5335mm (17')	5890-7653-R

DRILL TUBE

Ø 25mm Flushing hole



DIA Ø (D) mm	LENGTH (L) mm	CAT. NUMBER
87	4265mm (14')	5690-8743


P58/P68 EXTENSION DRILLING EQUIPMENT

THREAD SIZES P58/P68

P58 (ST58) & P68 (ST68) (SHOULDER DRIVE / TUBULAR DRILLING) - GROOVED FACE

		DIA Ø (D) mm	GAUGE CARBIDES	FACE CARBIDES	FACE FLUSHING	SIDE FLUSHING	GAUGE ANGLE	P58 CAT. NUMBER	P68 CAT. NUMBER
		89	8 x 12mm	5 x 11mm	4 x 9mm	0	35	4758-3089	NA
		102	9 x 14mm	6 x 12mm	3 x 11mm	0	35	4758-3002	4768-3002
		115	9 x 14mm	9 x 12mm	4 x 11mm	0	35	4758-3015	4768-3015
		127	10 x 14mm	10 x 12mm	5 x 11mm	0	35	4758-3027	4768-3027

P58 (ST58) & P68 (ST68) (SHOULDER DRIVE / TUBULAR DRILLING) - GROOVED FACE RETRAC

		DIA Ø (D) mm	GAUGE CARBIDES	FACE CARBIDES	FACE FLUSHING	SIDE FLUSHING	GAUGE ANGLE	P58 CAT. NUMBER	P68 CAT. NUMBER
		89	8 x 12mm	5 x 11mm	4 x 9mm	0	35	4758-3289	NA
		102	9 x 14mm	6 x 12mm	3 x 11mm	0	35	4758-3202	4768-3202
		115	9 x 14mm	9 x 12mm	4 x 11mm	0	35	4758-3215	4768-3215
		127	10 x 14mm	10 x 12mm	5 x 11mm	0	35	4758-3227	4768-3227

FOR HELP IN FINDING THE RIGHT PRODUCT FOR YOU, CALL +44-1246-299100

P&V
Padley & Venables

PAGE
39

© 2020 Padley & Venables Ltd.
Dronfield, Sheffield, England.

P58/P68 EXTENSION DRILLING EQUIPMENT

THREAD SIZES P58/P68

P58 (ST58) & P68 (ST68) (SHOULDER DRIVE / TUBULAR DRILLING) - DROP CENTRE

	DIA Ø (D) mm	GAUGE CARBIDES	FACE CARBIDES	FACE FLUSHING	SIDE FLUSHING	GAUGE ANGLE	P58 CAT. NUMBER	P68 CAT. NUMBER
	92	9 x 12mm	6 x 12mm	3 x 11mm	0	35	4758-4092	NA
	102	9 x 14mm	9 x 12mm	3 x 11mm	0	35	4758-4002	4768-4002
	115	9 x 14mm	9 x 12mm	4 x 11mm	0	35	4758-4015	4768-4015
	127	10 x 14mm	10 x 12mm	5 x 11mm	0	35	4758-4027	4768-4027

P58 (ST58) & P68 (ST68) (SHOULDER DRIVE / TUBULAR DRILLING) - DROP CENTRE RETRAC

	DIA Ø (D) mm	GAUGE CARBIDES	FACE CARBIDES	FACE FLUSHING	SIDE FLUSHING	GAUGE ANGLE	P58 CAT. NUMBER	P68 CAT. NUMBER
	92	9 x 12mm	6 x 12mm	3 x 11mm	0	35	4758-4292	NA
	102	9 x 14mm	9 x 12mm	3 x 11mm	0	35	4758-4202	4768-4202
	115	9 x 14mm	9 x 12mm	4 x 11mm	0	35	4758-4215	4768-4215
	127	10 x 14mm	10 x 12mm	5 x 11mm	0	35	4758-4227	4768-4227

P58 (ST58) & P68 (ST68) (SHOULDER DRIVE / TUBULAR DRILLING) - REAM BITS


	DIA Ø (D) mm	GAUGE CARBIDES	FACE CARBIDES	FACE FLUSHING	SIDE FLUSHING	GAUGE ANGLE	P58 CAT. NUMBER	P68 CAT. NUMBER
	152	15 x 16mm	0	3 x 16 mm	0	35	4758-5252-80	4768-5252-80

P58/P68 EXTENSION DRILLING EQUIPMENT

THREAD SIZES P58/P68

P58 THREAD - SHOULDER DRIVE TUBES


Ø 26mm Flushing hole



DIA Ø (D) mm	LENGTH (L) mm	CAT. NUMBER
76	1525mm (5') DRILL TUBE	5658-7615SD
76	1830mm (6') DRILL TUBE	5658-7618SD

P68 THREAD - SHOULDER DRIVE TUBES


Ø 30mm Flushing hole

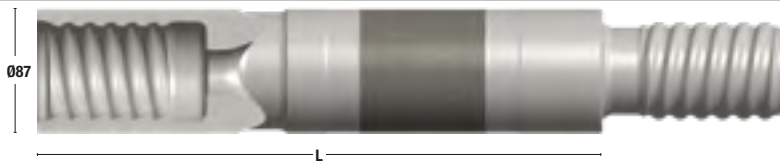

DIA Ø (D) mm	LENGTH (L) mm	CAT. NUMBER
87	1220mm (4') DRILL TUBE	5668-8712SD
87	1525mm (5') DRILL TUBE	5668-8715SD
87	1830mm (6') DRILL TUBE	5668-8718SD

TUBES - WITH BACK FLOW WATER VALVE

Ø 30mm Flushing hole

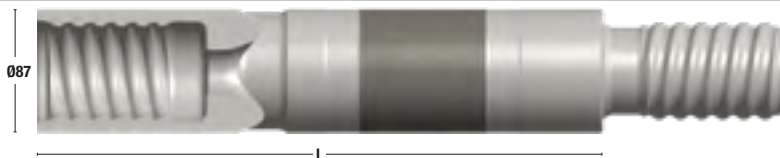

DIA Ø (D) mm	LENGTH (L) mm	CAT. NUMBER
87	1220mm (4') DRILL TUBE	5668-8712SDV
87	1525mm (5') DRILL TUBE	5668-8715SDV
87	1830mm (6') DRILL TUBE	5668-8718SDV

FOR HELP IN FINDING THE RIGHT PRODUCT FOR YOU, CALL +44-1246-299100

P&V
Padley & Venables

PAGE
41

© 2020 Padley & Venables Ltd.
Dronfield, Sheffield, England.

SHANK ADAPTORS

FIGURE 01

108 X 22mm (4 1/4" X 7/8") - HEXAGON



THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
R25	5	255	5425-2203-03	1.2

FIGURE 02

108 X 25mm (4 1/4" X 1") - HEXAGON



THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
R25	5	255	5425-2503-03	1.3

FIGURE 03

GD D93L, DH99; A/C BBC41, A/COPCO BBC41, 43, 45, 100, LC50



THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
R32	8	381	5432-1501-08	2
R25	10	381	5425-1501-10	2
R32	10	381	5432-1501-10	2

FIGURE 04

A/COPCO BBC51, 52, 54, 120



THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
R32	10	381	5432-1503-10	3
R38	10	381	5438-1503-10	3
P38	10	381	5488-1503-10	3

FIGURE 05

VL120, 130, 140, HOLMAN 115R, TAMROCK L750, GD PR123, IR URD475, 550, TAMROCK L750, FURUKAWA M120



THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
R32	14	356	5432-1417-14	3.5
R38	14	356	5438-1417-14	3.5
P38	14	356	5488-1417-14	3.5
R32	14	387	5432-1517-14	4
P38	14	387	5488-1517-14	4

FIGURE 06 - ATLAS COPCO

BBE57, MONT H100



THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
P38	14	537	5488-2108-14	5
P45	14	537	5495-2108-14	5

FIGURE 07 - ATLAS COPCO

COP125, 130, 131



THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
R32	14	405	5432-1618-14	3
P38	14	381	5488-1518-14	3

SHANKS

FIGURE 08 - ATLAS COPCO

COP131EB	THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
	P38	14	381	5488-15118-14	3.2

FIGURE 09 - ATLAS COPCO

1028HB	THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
	R28	N/A	400	5428-1655-00	2.8
	R32	N/A	400	5432-1655-00	2.8

FIGURE 09A - ATLAS COPCO

COP 1032LE/HB	THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
	R32	N/A	550	5432-2270-00	5
	P38	N/A	550	5488-2270-00	5

FIGURE 10 - ATLAS COPCO

COP1038 HD, 1038 HL, COP1038 HD, COP1238, COP1036HB, 1038HB, 1238, COP1038HL, 1238	THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
	R38	N/A	485	5438-1929-00	4
	P38	N/A	485	5488-1929-00	4
	P38	N/A	500	5488-2029-00	4.5
	P45	N/A	500	5495-2029-00	4.5
	R32	N/A	575	5432-2329-00	5
	P38	N/A	575	5488-2329-00	5.2

FIGURE 11 - ATLAS COPCO

COP1036HB, 1038HB, 1238 (COLLAR)	THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
	R32	N/A	575	5432-2376-00	5
	R38	N/A	575	5438-2376-00	5.2
	P38	N/A	575	5488-2376-00	5.2
	P45	N/A	575	5495-2376-00	5.5

FIGURE 12 - ATLAS COPCO

COP1132	THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
	R28	N/A	410	5428-16181-00	2.5
	R32	N/A	410	5432-16181-00	2.5
	P35	N/A	410	5485-16181-00	2.5
	R32	N/A	500	5432-20181-00	3
	P35	N/A	500	5485-20181-00	3

FIGURE 13 - ATLAS COPCO

COP1132 (FEM.)



THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
R32F	N/A	280	5432-11203-00	2.5

FIGURE 14 - ATLAS COPCO


COP1432, COP1532 FEM.



THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
R32F	N/A	341	5432-13147-00	4.5
R38F	N/A	341	5438-13147-00	4.5
P38F	N/A	341	5488-13147-00	4.5

FIGURE 15 - ATLAS COPCO

COP1338 EXTRACTOR



THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
R32	N/A	780	5432-31121-00	10.5
P38	N/A	780	5488-31121-00	11
P45	N/A	780	5495-31121-00	11.5

FIGURE 16 - ATLAS COPCO

COP1435, COP1140



THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
R32	N/A	410	5432-16235-00	2.6
P35	N/A	410	5485-16235-00	2.6
R32	N/A	500	5432-20235-00	3
P35	N/A	500	5485-20235-00	3.1

FIGURE 17 - ATLAS COPCO

COP1440, COP1550, COP1638, COP1838, COP2238



THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
R32	N/A	435	5432-1762-00	3.6
P35	N/A	435	5485-1762-00	3.8
R38	N/A	435	5438-1762-00	3.9
P38	N/A	435	5488-1762-00	3.9
R32	N/A	525	5432-2162-00	4.2
P35	N/A	525	5485-2162-00	4.3
R38	N/A	525	5438-2162-00	4.5
P38	N/A	525	5488-2162-00	4.5

FIGURE 18 - ATLAS COPCO

COP1440, COP1550, 1838HD (D=52mm)



THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
R32	N/A	525	5432-2163-00	5.7
P35	N/A	525	5485-2163-00	5.9
P38	N/A	525	5488-2163-00	6
P45	N/A	525	5495-2163-00	6.2
P51	N/A	525	5499-2163-00	6.5

SHANKS

FIGURE 19 - ATLAS COPCO

COP1838MUX



THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
P38	N/A	730	5488-29221-00	9.5
P45	N/A	730	5495-29221-00	10

FIGURE 20 - ATLAS COPCO

COP 1838EX



THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
P38	N/A	730	5488-29126-00	9.5
P45	N/A	730	5495-29126-00	10
P51	N/A	730	5499-29126-00	10.5

FIGURE 21 - ATLAS COPCO

COP 1850, 1840HE, 2150HE



THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
P45	N/A	565	5495-22127-00	6.8
P51	N/A	565	5499-22127-00	7.2
P51	N/A	770	5499-30127-00	10

FIGURE 22 - ATLAS COPCO

COP 2150/2550 (STRAIGHT SPLINE)



THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
P51	N/A	770	5499-30227-00	10

FIGURE 23 - ATLAS COPCO


COP 1240/1640/1840/1850/2150/2550HEX



THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
P38	N/A	770	5488-30129-00	10.5
P45	N/A	770	5495-30129-00	10.8
P51	N/A	770	5499-30129-00	11

FIGURE 23A - ATLAS COPCO


COP 2550UX



THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
P45	N/A	770	5495-30243-00	13
P51	N/A	770	5499-30243-00	13

FIGURE 24 - ATLAS COPCO

COP 2160/2560 EXTRACTOR




THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
P51	N/A	770	5499-30204-00	13.2
CT60	N/A	770	5490-30204-00	13.5

FIGURE 25 - ATLAS COPCO**COP 3038**


THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
P38	N/A	435	5488-17183-00	4.5
P45	N/A	435	5495-17183-00	4.8
P38	N/A	525	5488-21183-00	5.2

FIGURE 26 - ATLAS COPCO**COP 3038HE (HELICAL)**


THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
P38	N/A	435	5488-17224-00	4.5
P45	N/A	435	5495-17224-00	4.8
P38	N/A	525	5488-21224-00	5.2

FIGURE 26A - ATLAS COPCO**COP 3060MUX**


THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
P58	N/A	745	5458-29259-00	24
P68	N/A	745	5468-29259-00	24

FIGURE 26B - ATLAS COPCO**COP 3060MEX**


THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
P51	N/A	840	5499-33244-00	16
P60	N/A	840	5460-33244-00	17
CT60	N/A	840	5490-33244-00	17

FIGURE 27 - ATLAS COPCO**COP4050 MUX**

THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
P58	N/A	835	5458-33199-00	27
P68	N/A	835	5468-33199-00	27.5

FIGURE 28 - BOART**HD65 (FEMALE)**

THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
R32F	N/A	324	5432-13226-00	3.5

FIGURE 29 - BOART**HD65**

THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
R32	N/A	445	5432-1868-00	4.5

SHANKS

FIGURE 30 - BOART

HD125, HD150	THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
	R32	N/A	495	5432-2048-00	4.8
	R38	N/A	495	5438-2048-00	5
	P38	N/A	495	5488-2048-00	5

FIGURE 31 - CANNON


CH38 (JOYJH-2) (55mm BODY, FEM.)	THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
	P38F	N/A	390	5488-15200-00	5

FIGURE 32 - CANNON


CH38 (JOYJH-2) (55mm BODY)	THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
	P45	N/A	525	5495-21201-00	6

FIGURE 33 - CANNON

CH38 (JOYJH-2) (38mm BODY)	THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
	P38	N/A	444	5488-17195-00	4

FIGURE 34 - JOY

JOY VCR260 /360	THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
	P38	N/A	432	5488-1747-16	4

FIGURE 35 - DOOFOR


DF425/430S	THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
	R25	N/A	400	5425-16210-00	3
	R28	N/A	400	5428-16210-00	3

FIGURE 36 - DOOFOR

DF528, DF500S, DF530S	THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
	R32	N/A	424	5432-17234-00	3.5

FIGURE 37 - DOOFOR

DF528HD, DF538S, DF538L



THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
R32	N/A	470	5432-19135-00	3.6
R38	N/A	470	5438-19135-00	3.8
P38	N/A	470	5488-19135-00	3.8

FIGURE 38 - DOOFOR


DF550S, DF550L, DF540L



THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
R32	N/A	515	5432-20233-00	4
R38	N/A	515	5438-20233-00	4.1
P38	N/A	515	5488-20233-00	4.1

FIGURE 39 - DOOFOR

DF545HD, DF560



THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
R32	N/A	515	5432-20236-00	5.1
R38	N/A	515	5438-20236-00	5.3
P38	N/A	515	5488-20236-00	5.3
P45	N/A	515	5495-20236-00	5.6

FIGURE 40 - DOOFOR


DF545EXT, DF550EXT



THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
R32	N/A	582	5432-23237-00	4.8
R38	N/A	582	5438-23237-00	5
P38	N/A	582	5488-23237-00	5

FIGURE 41 - DOOFOR


DF545EXT HD, DF540L-BLT, DF560EXT, DF560L-BLT



THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
R32	N/A	582	5432-23239-00	5.5
R38	N/A	582	5438-23239-00	5.7
P38	N/A	582	5488-23239-00	5.7
P45	N/A	582	5495-23239-00	5.9

FIGURE 41A - DOOFOR

DF800



THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
CT60	N/A	600	5490-24252-00	10

FIGURE 42 - FURUKAWA

PD200 (H/D CHUCK)



THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
R38	14	381	5438-1514-14	3.7
P38	14	381	5488-1514-14	3.7
P45	14	381	5495-1514-14	3.9

SHANKS

FIGURE 43 - FURUKAWA

HD90	THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
	P38	N/A	512	5488-20107-00	4.3

FIGURE 44 - FURUKAWA

HD150	THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
	R38	N/A	520	5438-21117-00	4
	P38	N/A	520	5488-21117-00	4

FIGURE 45 - FURUKAWA

HD180	THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
	P38	14	455	5488-1809-14	3.8

FIGURE 46 - FURUKAWA

HD190	THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
	R38	N/A	480	5438-19109-00	4.5
	P38	N/A	480	5488-19109-00	4.5

FIGURE 47 - FURUKAWA

HD210	THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
	P38	N/A	430	5488-17215-00	3.8

FIGURE 48 - FURUKAWA

HD260, HD300	THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
	P38	16	655	5488-2620-16	6
	P45	16	655	5495-2620-16	6.5

FIGURE 49 - FURUKAWA

HD500 (6 SPLINE)	THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
	P38	16	625	5488-25148-16	8.3
	P45	16	625	5495-25148-16	8.5

FIGURE 50 - FURUKAWA**HD609**

THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
P38	N/A	615	5488-2490-00	6.3
P45	N/A	615	5495-2490-00	6.5
P38	N/A	690	5488-2790-00	7
P45	N/A	690	5495-2790-00	7.2

FIGURE 51 - FURUKAWA**HD609QED**

THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
P38	N/A	860	5488-34132-00	9
P45	N/A	860	5495-34132-00	9.2

FIGURE 52 - FURUKAWA**HD612**

THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
P45	N/A	710	5495-28112-00	8.3
P51	N/A	710	5499-28112-00	8.5

FIGURE 53 - FURUKAWA**HD612QED**

THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
P45	N/A	900	5495-36134-00	11.2
P51	N/A	900	5499-36134-00	11.4

FIGURE 54 - FURUKAWA**HD615**

THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
P51	N/A	880	5499-35136-00	15

FIGURE 55 - FURUKAWA**HD615QED**

THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
P51	N/A	880	5499-35139-00	15.4

FIGURE 56 - FURUKAWA**HD709**

THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
P45	N/A	620	5495-24177-00	6.2

SHANKS

FIGURE 57 - FURUKAWA

HD709QED	THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
	P45	N/A	800	5495-31180-00	9.5

FIGURE 58 - FURUKAWA

HD712	THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
	P45	N/A	590	5495-23161-00	7
	P51	N/A	590	5499-23161-00	7.3
	P45	N/A	790	5495-31161-00	9.9
	P51	N/A	790	5499-31161-00	10.2

FIGURE 59 - FURUKAWA

HD712QED	THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
	P45	N/A	880	5495-35164-00	12.7
	P51	N/A	880	5499-35164-00	13.4

FIGURE 60 - FURUKAWA

HD715	THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
	P51	N/A	790	5499-31167-00	12.7

FIGURE 61 - FURUKAWA

HD715QED	THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
	P51	N/A	885	5499-35175-00	16

FIGURE 62 - INGERSOLL RAND

YD90M	THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
	R32	10	330	5432-1333-10	3.0

FIGURE 63 - INGERSOLL RAND

YH65, 70, 75, 80	THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
	P38	19	496	5488-2083-19	4.7
	P45	19	496	5495-2083-19	4.9
	P38	19	610	5488-2483-19	5.5
	P45	19	610	5495-2483-19	5.7

FIGURE 64 - INGERSOLL RAND**YH65RP, 80RP**

THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
P38	19	700	5488-2892-19	8
P45	19	700	5495-2892-19	8.5

FIGURE 65 - INGERSOLL RAND**YH80A**

THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
P45	19	500	5495-20114-19	6.4

FIGURE 66 - INGERSOLL RAND**YH 95,100**

THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
P45	22	622	5495-2584-22	8.8
P51	22	622	5499-2584-22	9

FIGURE 67 - INGERSOLL RAND**YH110VRP**

THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
P45	N/A	900	5495-35104-00	11.8
P51	N/A	900	5499-35104-00	12

FIGURE 68 - MONTABERT**HC20 (D=45mm) FEM.**

THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
R32F	N/A	187	5432-07202-00	2.4

FIGURE 69 - MONTABERT**HC20 (D=45mm)**

THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
R32	N/A	287	5432-11194-00	2.2

FIGURE 70 - MONTABERT**HC25 (D=45mm)**

THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
R32	N/A	287	5432-11207-00	2.3
P35	N/A	287	5485-11207-00	2.4
R38	N/A	287	5438-11207-00	2.5
P38	N/A	287	5488-11207-00	2.5

SHANKS

FIGURE 71 - MONTABERT

HC25 (D=45mm) FEM.



THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
R32	N/A	202	5432-08208-00	2.6

FIGURE 72 - MONTABERT

HC40/HC50 (D=38mm)



THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
R32	N/A	381	5432-1564-00	3
P35	N/A	381	5485-1564-00	3.2
R38	N/A	381	5438-1564-00	3.3
P38	N/A	381	5488-1564-00	3.3
R32	N/A	438	5432-1764-00	3.5
P35	N/A	438	5485-1764-00	3.6
R38	N/A	438	5438-1764-00	3.7
P38	N/A	438	5488-1764-00	3.7

FIGURE 73 - MONTABERT

HC40 FEMALE (D=45mm)



THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
R32	N/A	270	5432-1099-00	2.6

FIGURE 74 - MONTABERT

HC80, HC90, HC105 (D=38mm)



THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
R38	N/A	440	5438-1756-00	4
P38	N/A	440	5488-1756-00	4
R38	N/A	508	5438-2056-00	4.3
P38	N/A	508	5488-2056-00	4.3

FIGURE 74A - MONTABERT

HC95LA



THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
R38	N/A	438	5438-17238-00	5.5
P38	N/A	438	5488-17238-00	5.5
P45	N/A	453	5495-18238-00	5.8

FIGURE 74B - MONTABERT

HC95LM



THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
R32	N/A	503	5432-20240-00	5.9
R38	N/A	503	5438-20240-00	6.1
P38	N/A	503	5488-20240-00	6.1
P45	N/A	518	5495-20240-00	6.2

FIGURE 74C - MONTABERT


HC95LQ



THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
P45	N/A	518	5495-20241-00	6.5
P51	N/A	530	5499-21241-00	6.9

FIGURE 75 - MONTABERT

HC80, HC110, HC120 (D=45mm)



THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
R38	N/A	415	5438-1657-00	4.5
P38	N/A	415	5488-1657-00	4.5
P45	N/A	425	5495-1757-00	5.5
R38	N/A	460	5438-1857-00	5.8
P38	N/A	460	5488-1857-00	5.8
R38	N/A	490	5438-1957-00	6
P38	N/A	490	5488-1957-00	6
P45	N/A	490	5495-1957-00	6.2
R38	N/A	530	5438-2157-00	6.5
P38	N/A	530	5488-2157-00	6.5
P45	N/A	530	5495-2157-00	6.7

FIGURE 76 - MONTABERT

HC80R, HC105R, HC107R, HC108R, HC109R, HC110R, HC120R (D=45mm)



THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
P35	N/A	670	5485-2795-00	7.3
P38	N/A	670	5488-2795-00	7.4
P45	N/A	670	5495-2795-00	8.2
P45	N/A	770	5495-3095-00	9.2

FIGURE 77 - MONTABERT

HC120R, HC150R, HC155R, HC158R (D=51mm)



THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
P45	N/A	670	5495-27131-00	9.7
P51	N/A	670	5499-27131-00	9.9
P45	N/A	770	5495-30131-00	11
P51	N/A	770	5499-30131-00	11.1

FIGURE 78 - MONTABERT

HC160, 170



THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
P45	N/A	807	5495-32152-00	15
P51	N/A	807	5499-32152-00	15.1
CT60	N/A	807	5490-32152-00	15.3

FIGURE 79 - MONTABERT

HC200A



THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
P51	N/A	840	5499-33133-00	16.4
P60	N/A	840	5460-33133-00	16.6
CT60	N/A	840	5490-33133-00	16.6

SHANKS

FIGURE 80 - TAMROCK / SANDVIK

HL300S FEM.



THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
R32	N/A	245	5432-1096-00	2.6

FIGURE 81 - TAMROCK / SANDVIK

HL300



THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
R32	N/A	400	5432-1612-00	2.6
R32	N/A	500	5432-2012-00	3.1

FIGURE 82 - TAMROCK / SANDVIK

L400, L410, L500, L510



THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
R32	10	381	5432-1519-10	2

FIGURE 83 - TAMROCK / SANDVIK

HLR438, L550



THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
R38	12	381	5438-1535-12	4
P38	12	381	5488-1535-12	4

FIGURE 84 - TAMROCK / SANDVIK

HL438TS, HL538



THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
R38	N/A	450	5438-1835-00	4.4
P38	N/A	450	5488-1835-00	4.4
R32	N/A	495	5432-2035-00	4.7
R38	N/A	495	5438-2035-00	4.8
P38	N/A	495	5488-2035-00	4.8

FIGURE 85 - TAMROCK / SANDVIK

HL500 S, HL510 S (D=38mm)



THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
R32	N/A	450	5432-1881-00	3.8
R38	N/A	450	5438-1881-00	3.9
P38	N/A	450	5488-1881-00	3.9
P38	N/A	500	5488-2081-00	4.2
P38	N/A	550	5488-2281-00	4.5

FIGURE 86 - TAMROCK / SANDVIK

HL500, HL510 (D=45mm)




THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
R32	N/A	550	5432-22128-00	5.1
P35	N/A	550	5485-22128-00	5.3
P38	N/A	550	5488-22128-00	5.3
P45	N/A	550	5495-22128-00	5.5

FIGURE 87 - TAMROCK / SANDVIK**HL500 (FEM.)**


THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
R32	N/A	350	5432-1481-00	3.9

FIGURE 88 - TAMROCK / SANDVIK**HL550 SUPER, 560 SUPER**

THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
P35	N/A	460	5485-1882-00	4.9
R38	N/A	460	5438-1882-00	5
P38	N/A	460	5488-1882-00	5
P35	N/A	500	5485-2082-00	5.2
R38	N/A	500	5438-2082-00	5.3
P38	N/A	500	5488-2082-00	5.3
P45	N/A	500	5495-2082-00	5.5

FIGURE 89 - TAMROCK / SANDVIK**HLX1**

THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
R25	N/A	255	5425-10231-00	1.1
R28	N/A	255	5428-10231-00	1.1

FIGURE 90 - TAMROCK / SANDVIK**RD314 (FEM.)**

THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
R32	N/A	205	5432-08223-00	2.1

FIGURE 91 - TAMROCK / SANDVIK**RD520/RD525**

THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
P38	N/A	525	5488-21228-00	5.6
P35	N/A	600	5485-24228-00	6.6
P38	N/A	600	5488-24228-00	6.7
P35	N/A	745	5485-29228-00	7.4
P38	N/A	745	5488-29228-00	7.5

FIGURE 91A - TAMROCK / SANDVIK**RD520/RD525-PE**

THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
R32	N/A	745	5432-29232-00	7
P35	N/A	745	5485-29232-00	7.5
P38	N/A	745	5488-29232-00	7.7

SHANKS

FIGURE 92 - TAMROCK / SANDVIK

HLX5/HFX5T



THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
R32	N/A	500	5432-20150-00	5
P35	N/A	500	5485-20150-00	5.1
R38	N/A	500	5438-20150-00	5.2
P38	N/A	500	5488-20150-00	5.2
P45	N/A	500	5495-20150-00	5.5
R32	N/A	575	5432-23150-00	5.5
P35	N/A	575	5485-23150-00	5.6
P38	N/A	575	5488-23150-00	5.7
P45	N/A	575	5495-23150-00	5.9
P35	N/A	720	5485-28150-00	6.6
P38	N/A	720	5488-28150-00	6.7

FIGURE 92A - TAMROCK / SANDVIK

HLX5/PE-45



THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
R32	N/A	575	5432-23213-00	6.2
P38	N/A	575	5488-23213-00	6.4
R32	N/A	720	5432-28213-00	7.2
P38	N/A	720	5488-28213-00	7.4

FIGURE 93 - TAMROCK / SANDVIK

HL600 (D=45mm)



THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
P38	N/A	525	5488-2167-00	6
P45	N/A	525	5495-2167-00	6.4
P38	N/A	600	5488-2467-00	6.5
P45	N/A	600	5495-2467-00	6.9

FIGURE 94 - TAMROCK / SANDVIK

HL600 (D=52mm)



THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
P45	N/A	650	5495-2697-00	8.3
P51	N/A	650	5499-2697-00	8.6

FIGURE 95 - TAMROCK / SANDVIK

HL700/HL710/HL800T/HF810T/HL650 (D=45mm)



THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
P38	N/A	600	5488-24120-00	7
P45	N/A	600	5495-24120-00	7.2

FIGURE 96 - TAMROCK / SANDVIK

HL700, HL710, HL800, HF810, HL650, HL810 (D=52mm)



THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
P38	N/A	600	5488-24125-00	8
P45	N/A	600	5495-24125-00	8.2
P51	N/A	600	5499-24125-00	8.5

FIGURE 97 - TAMROCK / SANDVIK

HL1000, HL1010, HL1010S (D=52mm)



THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
P45	N/A	590	5495-2360-00	9.3
P51	N/A	590	5499-2360-00	9.5
P45	N/A	670	5495-2660-00	10
P51	N/A	670	5499-2660-00	10.2

FIGURE 98 - TAMROCK / SANDVIK


HL1000, HL1010 (D=60mm)



THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
P51	N/A	670	5499-26162-00	12.7
P60	N/A	670	5460-26162-00	12.7
CT60	N/A	670	5490-26162-00	13

FIGURE 99 - TAMROCK / SANDVIK

HL1000 (80mm), HL1010 (SHOULDER DRIVE)



THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
P58	N/A	635	5458-25110-00	18.4
P68	N/A	635	5468-25110-00	18.4

FIGURE 100 - TAMROCK / SANDVIK

HL1000 EXTRACTOR (D=52mm)



THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
P51	N/A	840	5499-33101-00	16

FIGURE 101 - TAMROCK / SANDVIK


HL1500 (D=60mm)



THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
P51	N/A	760	5499-30140-00	16
P60	N/A	760	5460-30140-00	16.4
CT60	N/A	760	5490-30140-00	16.4

FIGURE 102 - TAMROCK / SANDVIK

HL1500 (D=80mm) (SHOULDER DRIVE)



THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
P58	N/A	635	5458-25158-00	17.6
P68	N/A	635	5468-25158-00	18.2

FIGURE 103 - TAMROCK / SANDVIK

HL1500 (D=80mm) (SHOULDER DRIVE W/COLLAR)



THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
CT60	N/A	760	5490-30158-00	19.5

SHANKS

FIGURE 104 - TAMROCK / SANDVIK

HL1500PE, 1000PE, 1560T (D=65mm)



THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
P51	N/A	760	5499-30166-00	16.3
P60	N/A	760	5460-30166-00	17
CT60	N/A	760	5490-30166-00	17

FIGURE 104A - TAMROCK / SANDVIK


RD900-PE65, RD926/927



THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
P51	N/A	670	5499-26256-00	13.5
P60	N/A	670	5460-26256-00	15
CT60	N/A	670	5490-26256-00	15

FIGURE 105 - TAMROCK / SANDVIK

HL1500 SPE-90



THREAD FORM	TUBE SIZE (mm)	LENGTH (mm)	CAT. NUMBER	WEIGHT (Kg)
P58	N/A	635	5458-25188-00	22
P68	N/A	635	5468-25188-00	22
CT60	N/A	760	5490-30188-00	25

ANCILLARY EQUIPMENT

FOR HELP IN FINDING THE RIGHT PRODUCT FOR YOU, CALL +44-1246-299100

P&V
Padley & Venables

PAGE
63

© 2020 Padley & Venables Ltd.
Dronfield, Sheffield, England.

CONVERSION COUPLINGS



DIA Ø (D) mm	LENGTH (L) mm	THREAD	CAT. NUMBER
43mm (1 5/8")	159mm (6 1/4")	R25/R28	5525-2800
45mm (1 3/4")	159mm (6 1/4")	R25/R32	5525-3200
55mm (2 1/8")	159mm (6 1/4")	R32/R38	5532-3800
55mm (2 1/8")	193mm (7 5/8")	R32/P38	5532-8800
55mm (2 1/8")	194mm (7 5/8")	R35/P38	5535-8800
55mm (2 1/8")	194mm (7 5/8")	P38/R38	5588-3800
63.5mm (2 1/2")	199mm (7 7/8")	P38/P45	5588-9500
72mm (2 13/16")	234mm (9 1/2")	P45/P51	5595-9900
80mm (3 1/8")	250mm (9 7/8")	P51/P60	5599-6000

BIT ADAPTORS



DIA Ø (D) mm	LENGTH (L) mm	THREAD	CAT. NUMBER
45mm (1 3/4")	187mm (7 3/8")	R32 FEMALE / R25 MALE	5500-3225
55mm (2 1/8")	216mm (8 1/2")	R38 FEMALE / P38 MALE	5500-3888
54mm (2 1/8")	203mm (8")	P38 FEMALE / R32 MALE	5500-8832
55mm (2 1/8")	216mm (8 1/2")	R38 FEMALE / R32 MALE	5500-3832
63.5mm (2 1/2")	238mm (9 3/8")	P45 FEMALE / P38 MALE	5500-9588
71mm (2 3/4")	300mm (12")	P51 FEMALE / P45 MALE	5500-9995
80mm (3 1/8")	330mm (13")	P60 FEMALE / P51 MALE	5500-6099
39mm (1 1/2")	187mm (7 3/8")	R25 FEMALE / R32 MALE	5500-2532
45mm (1 3/4")	187mm (7 3/8")	R28 FEMALE / R32 MALE	5500-2832
45mm (1 3/4")	216mm (8 1/2")	R32 FEMALE / R38 MALE	5500-3238
45mm (1 3/4")	216mm (8 1/2")	R32 FEMALE / P38 MALE	5500-3288
55mm (2 1/8")	216mm (8 1/2")	P38 FEMALE / R38 MALE	5500-8838
55mm (2 1/8")	280mm (11")	P38 FEMALE / P45 MALE	5500-8895
64mm (2 1/2")	280mm (11")	P45 FEMALE / P51 MALE	5500-9599
76mm (3")	280mm (11")	P51 FEMALE / CT60 MALE	5500-9990
82mm (3 1/4")	330mm (13")	P60 FEMALE / CT60 MALE	5500-6090
82mm (3 1/4")	330mm (13")	CT60 FEMALE / P60 MALE	5500-9060
82mm (3 1/4")	280mm (11")	CT60 FEMALE / P51 MALE	5500-9099
87mm (3 3/8")	330mm (13")	P68 FEMALE / P58 MALE	5500-6858

ANCILLARY EQUIPMENT

GUIDE ADAPTORS



THREAD	CAT. NUMBER
P38F / P38M	5505-8888
P45F / P45M	5505-9595
P51F / P51M	5505-9999

FISHING TOOLS - COUPLING RECOVERY



THREAD	CAT. NUMBER
R25	5910-2501
R32	5910-3201
R38	5910-3801
P38	5910-8801
P45	5910-9501
P51	5910-9901
P60	5910-6001

FISHING PIKES



THREAD	CAT. NUMBER
P58	5910-5804
P68	5910-6804
P35	5910-8504
P38	5910-8804
P45	5910-9504
P51	5910-9904
CT60	5910-9004

ROD RECOVERY



THREAD	CAT. NUMBER
R25	5910-2502
R32	5910-3202
R38	5910-3802
P38	5910-8802
P45	5910-9502
P51	5910-9902

ANCILLARY EQUIPMENT

GAUGES

BIT GRINDING GAUGE



BUTTON BIT GRINDING GAUGE



DESCRIPTION

CAT. NUMBER

CROSS, x BITS & STEMS

5940-1100

BUTTON BIT

5940-0900

ROD SPANNER



DESCRIPTION

CAT. NUMBER

WEIGHT
(Kg)

25mm (1") ACROSS FLATS HEX

5930-0250

8.8

32mm (1¼") HEX & 38mm (1½") RND

5930-0320


8.8

38mm (1½") ACROSS FLATS HEX

5930-0380

8.8

SEALS

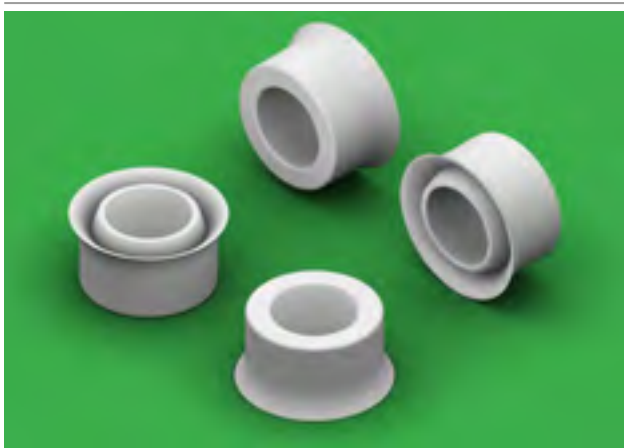

DESCRIPTION

CAT. NUMBER

5mm (⅜")

5970-0500

8mm (⅝")

5970-0800

10mm (⅞")

5970-1000

11mm (⅞")

5970-1100

12mm (½")

5970-1200

14mm (⅝")

5970-1400

16mm (⅝")

5970-1600

19mm (¾")

5970-1900

22mm (⅞")

5970-2200

25mm (1")

5970-2500

32mm (1 ¼")

5970-3200





Padley & Venables Ltd.
Callywhite Lane, Dronfield, Sheffield S18 2XT, England.
Tel: +44-1246-299100 | Fax: +44-1246-290354
E-mail: sales@padley-venables.com | www.padley-venables.com

**QUALITY TOOLS
MADE IN BRITAIN
PROVEN WORLDWIDE**



EXCELLENCE SINCE 1911

"P&V", "THE DRILLER MAN" LOGO AND "NINJA" ARE TRADE MARKS OF PADLEY AND VENABLES LTD.
RD2020.6/E&OE